

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号  
特開2002-91726  
(P2002-91726A)

(43) 公開日 平成14年3月29日 (2002.3.29)

(51) Int.Cl. <sup>7</sup>	識別記号	F I	テ-マ-ト* (参考)		
G 0 6 F	3/12	G 0 6 F	3/12	C	2 C 0 6 1
B 4 1 J	5/30	B 4 1 J	5/30	Z	2 C 0 8 7
	29/38		29/38	Z	5 B 0 2 1

審査請求 未請求 請求項の数21 O L (全 17 頁)

(21) 出願番号 特願2000-277247(P2000-277247)

(22) 出願日 平成12年9月12日 (2000.9.12)

(71) 出願人 000001007

キヤノン株式会社

東京都大田区下丸子3丁目30番2号

(72) 発明者 藤沢 淳

東京都大田区下丸子3丁目30番2号 キヤ  
ノン株式会社内

(74) 代理人 100076428

弁理士 大塚 康徳 (外2名)

Fターム(参考) 2C061 AP01 HJ06 HJ08 HQ17 HS01

2C087 AB05 BA03 BA06 BA07 BC01

BC05 BD13 BD24 BD40 BD52

CA02

5B021 AA01 BB01 BB08 BB10 CC05


DD15

(54) 【発明の名称】 プリンタシステム

(57) 【要約】

【課題】 XML文書をそのまま印刷させる。

【解決手段】 プリントクライアント101からXMLプリンタ100bに対して文書のURLを指定することで、ドキュメントサーバ103で提供されているHTML文書を読み出させる。XMLプリンタ100bは、フォーマットサーバ100aによりそれをSVG形式に変換させ、それを解釈して必要があればイメージをダウンロードし、それを文書に組み込んで印刷する。

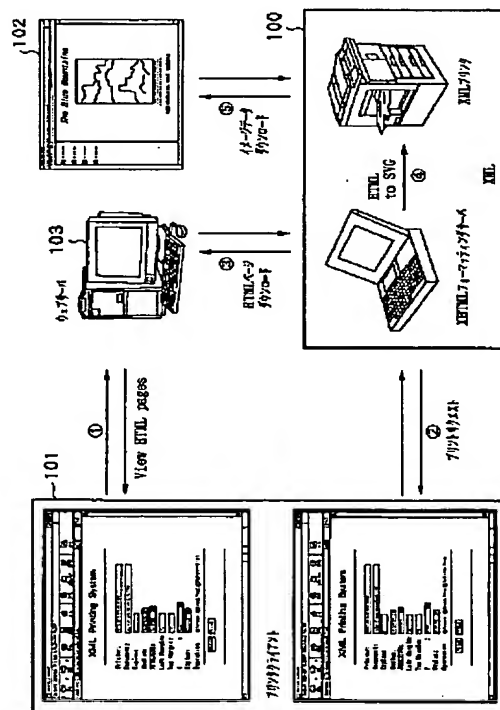

BEST AVAILABLE COPY

## 【特許請求の範囲】

【請求項 1】 ネットワークに接続されたプリンタシステムであって、

印刷指示データを受信すると、それが文書データのネットワーク上における場所を指定した場所データである場合、指定された場所から文書データを獲得する獲得手段と、

前記獲得手段により獲得した文書データを解釈する解釈手段と、

前記解釈手段により解釈された文書データに基づいてレンダリングし、印刷する印刷手段とを備えることを特徴とするプリンタシステム。

【請求項 2】 印刷指示データを受信すると、それが文書データのネットワーク上における場所を指定した場所データであるか、文書データであるかを判別する判別手段を更に備え、

前記解釈手段は、印刷指示データが文書データである場合、その文書データを解釈することを特徴とする請求項 1 に記載のプリンタシステム。

【請求項 3】 前記文書データは書式が不定の文書データであり、前記解釈手段は、前記文書データを解釈可能な形式に変換する変換手段を有し、該変換手段は、文書データの変換時に、書式情報を参照して印刷時の書式を確定することを特徴とする請求項 1 に記載のプリンタシステム。

【請求項 4】 前記変換手段は、文書データの書式をあらかじめ定義したスタイルシートに従って、前記文書データの書式を確定することを特徴とする請求項 3 に記載のプリンタシステム。

【請求項 5】 前記解釈手段は、前記文書データに埋め込むべきオブジェクトの指定を見いだすと、当該オブジェクトの指定に基づいて、指定されたオブジェクトを獲得し、前記文書データの指定箇所に埋め込むことを特徴とする請求項 1 乃至 4 のいずれか 1 項に記載のプリンタシステム。

【請求項 6】 前記解釈手段は、獲得したオブジェクトを格納するキャッシュ手段を有し、前記オブジェクトの指定に基づいて指定されたオブジェクトを獲得する際に、まず前記キャッシュ手段を参照し、そこに格納されていればそのオブジェクトを前記文書データに埋め込み、格納されていなければ、指定された位置を参照してオブジェクトを獲得することを特徴とする請求項 5 に記載のプリンタシステム。

【請求項 7】 符号化データを復号する復号手段を更に備えることを特徴とする請求項 1 に記載のプリンタシステム。

【請求項 8】 前記印刷手段はカラー印刷機能を有し、該カラー印刷機能によりカラー印刷するために、前記文書データのカラーと、前記カラー印刷機能により出力するカラー情報とを整合するカラーマッチング手段を更に

備えることを特徴とする請求項 1 に記載のプリンタシステム。

【請求項 9】 ネットワークに接続されたプリンタシステムにおいて、

印刷指示データを受信すると、それが文書データのネットワーク上における場所を指定した場所データである場合、指定された場所から文書データを獲得する獲得工程と、

前記獲得工程により獲得した文書データを解釈する解釈工程と、

前記解釈工程により解釈された文書データに基づいてレンダリングし、印刷する印刷工程とを備えることを特徴とするプリンタシステムの制御方法。

【請求項 10】 印刷指示データを受信すると、それが文書データのネットワーク上における場所を指定した場所データであるか、文書データであるかを判別する判別工程を更に備え、

前記解釈工程は、印刷指示データが文書データである場合、その文書データを解釈することを特徴とする請求項 9 に記載のプリンタシステムの制御方法。

【請求項 11】 前記文書データは書式が不定の文書データであり、前記解釈工程は、前記文書データを解釈可能な形式に変換する変換工程を有し、該変換工程は、文書データの変換時に、書式情報を参照して印刷時の書式を確定することを特徴とする請求項 10 に記載のプリンタシステムの制御方法。

【請求項 12】 前記変換工程は、文書データの書式をあらかじめ定義したスタイルシートに従って、前記文書データの書式を確定することを特徴とする請求項 11 に記載のプリンタシステムの制御方法。

【請求項 13】 前記解釈工程は、前記文書データに埋め込むべきオブジェクトの指定を見いだすと、当該オブジェクトの指定に基づいて、指定されたオブジェクトを獲得し、前記文書データの指定箇所に埋め込むことを特徴とする請求項 9 乃至 12 のいずれか 1 項に記載のプリンタシステムの制御方法。

【請求項 14】 前記解釈工程は、獲得したオブジェクトをキャッシュに格納し、前記オブジェクトの指定に基づいて指定されたオブジェクトを獲得する際に、まず前記キャッシュを参照し、そこに格納されていればそのオブジェクトを前記文書データに埋め込み、格納されていなければ、指定された位置を参照してオブジェクトを獲得することを特徴とする請求項 13 に記載のプリンタシステムの制御方法。

【請求項 15】 所定言語で記述された文書データを処理可能なプリンタとネットワークとに接続されたフォーマット変換装置であって、

文書データを受信すると、その文書データを、当該文書に対して指定された書式情報を参照して前記プリンタが処理可能な形式に変換する変換手段と、

前記変換手段による変換に際して、前記プリンタの機能情報を獲得する獲得手段とを備えることを特徴とするフォーマット変換装置。

【請求項16】 前記変換手段は、XMLまたはHTML形式の文書データを、SVG形式の文書データに変換することを特徴とする請求項15に記載のフォーマット変換装置。

【請求項17】 文書データを処理可能な形式に変換するフォーマット変換装置とネットワークとに接続されたプリンタであって、

印刷指示データを受信すると、それが文書データのネットワーク上における場所を指定した場所データである場合、指定された場所から文書データを獲得する獲得手段と、

前記フォーマット変換装置に対して獲得した文書データを送信し、処理可能な形式に変換させる変換手段と、前記変換手段により変換された文書データを解釈する解釈手段と、

前記解釈手段により解釈された文書データに基づいてレンダリングし、印刷する印刷手段とを備えることを特徴とするプリンタ。

【請求項18】 前記解釈手段は、前記文書データに埋め込むべきオブジェクトの指定を見いだすと、当該オブジェクトの指定に基づいて、指定されたオブジェクトを獲得し、前記文書データの指定箇所に埋め込むことを特徴とする請求項17に記載のプリンタ。

【請求項19】 請求項15又は16に記載のフォーマット変換装置と、請求項17又は18に記載のプリンタとを組み合わせることを特徴とするプリンタシステム。

【請求項20】 所定言語で記述された文書データを、プリンタで処理可能な形式に変換するためのコンピュータプログラムを格納するためのコンピュータ可読記憶媒体であって、前記コンピュータプログラムは、文書データを受信すると、その文書データを、当該文書に対して指定された書式情報を参照して前記プリンタが処理可能な形式に変換する変換工程のコードと、前記変換工程のコードによる変換に際して、前記プリンタの機能情報を獲得する獲得工程のコードとを含むことを特徴とするコンピュータ可読記憶媒体。

【請求項21】 文書データを処理可能な形式に変換するフォーマット変換装置とネットワークとに接続されたプリンタを制御するコンピュータプログラムを格納するためのコンピュータ可読の記憶媒体であって、前記コンピュータプログラムは、

印刷指示データを受信すると、それが文書データのネットワーク上における場所を指定した場所データである場合、指定された場所から文書データを獲得する獲得工程のコードと、

前記フォーマット変換装置に対して獲得した文書データ

を送信し、処理可能な形式に変換させる変換工程のコードと、

前記変換工程のコードにより変換された文書データを解釈する解釈工程のコードと、

前記解釈工程のコードにより解釈された文書データに基づいてレンダリングする印刷工程のコードとを含むことを特徴とするコンピュータ可読記憶媒体。

【発明の詳細な説明】

【0001】

10 【発明の属する技術分野】本発明は、たとえばホストコンピュータで作成された文書データを印刷するためのプリンタシステムに関し、特に、文字や画像といったオブジェクトの論理構造を指定をすることで文書の体裁を定義するマークアップ言語により記述された文書をそのまま印刷するためのプリンタシステムに関する。

【0002】

20 【従来の技術】近年、インターネットの普及により、多くの文書がHTMLと呼ばれるマークアップ言語で記述されてWWWサーバ（HTTPサーバ）により提供されている。HTMLで記述された文書はウェブブラウザと呼ばれるアプリケーションにより読み込まれ、ウェブブラウザは文書中に埋め込まれたタグを解釈することで、文書や画像を端末画面上に配置・表示する。その際、文書中のオブジェクトは、オブジェクトそのものではなく、それがおかれた場所及びオブジェクトの識別子によって指定されている場合もある。そのような場合には、ウェブブラウザは指定された場所（URLと呼ばれる記述子により記述される）にアクセスして、指定されたオブジェクトを読み、文書に合成して表示する。

30 【0003】ホストコンピュータは、このHTML文書を印刷する際には、通常の文書と同様、ウェブブラウザにより形成された画像データ（オブジェクトの集合体である画像）を、オペレーティングシステムの関数を使用してプリンタに送出する。その際に、使用するプリンタに対応したプリンタドライバによって、画像データはプリンタにより解釈可能な形式に変換される。

40 【0004】このように、ホストコンピュータが、HTML文書を印刷するためには、必要なオブジェクトをすべて収集して表示形式に変換した上で、さらにプリンタで解釈可能な形式に変換するという工程を踏んでいた。

【0005】一方、HTMLを拡張したXMLというマークアップ言語も普及しつつある。XMLは、文書の構造をDTD（文書型定義）という文書型定義ファイルで表すことで、表現方法の指定や文章中の文字列に意味を付加するような独自のタグを拡張することができる。このXMLによってHTMLを定義したXHTMLというマークアップ言語も使用されつつある。

【0006】

50 【発明が解決しようとする課題】このように、HTML

文書の印刷のためには、ホストコンピュータは、データの収集や変換といった多くの処理を実行しなければならず、負担が大きかった。

【0007】また、XMLやHTML、XHTMLといったマークアップ言語は標準化が進められており、オペレーティングシステムやアプリケーションプログラムに関わらず、それらマークアップ言語で記述された文書であればその互換性が保障される体制が整いつつある。このようなきわめて互換性の高い、ハードウェアやオペレーティングシステム、アプリケーションから独立した言語であれば、プリンタが解釈可能な形式にホストコンピュータにより変換されなくとも、その言語そのものを解釈・印刷するプリンタもまた多くの異なる種類の環境下で使用可能である。このようなプリンタであれば、ますますホストコンピュータの負担を軽減することができる。

【0008】本発明は上記従来例に鑑みて成されたもので、標準化された言語で記述された文書データをそのままの形式で解釈でき、印刷できるプリンタシステムを提供することを目的とする。

【0009】さらに、文書中に埋め込まれたオブジェクトが、URLやファイル名といった参照データであっても、それら参照データからオブジェクトを収集して文書を完成させて印刷させることができるプリンタシステムを提供することを目的とする。

【0010】さらに、文書そのものではなく、参照データを受け取ることで印刷が可能なプリンタシステムを提供することを目的とする。

【0011】さらに、ひとつの文書について、簡単にレイアウトを変更して印刷することが可能なプリンタシステムを提供することを目的とする。

【0012】

【課題を解決するための手段】上記目的を達成するために本発明は次のような構成からなる。

【0013】ネットワークに接続されたプリンタシステムであって、印刷指示データを受信すると、それが文書データのネットワーク上における場所を指定した場所データである場合、指定された場所から文書データを獲得する獲得手段と、前記獲得手段により獲得した文書データを解釈する解釈手段と、前記解釈手段により解釈された文書データに基づいてレンダリングし、印刷する印刷手段とを備える。

【0014】また好ましくは、印刷指示データを受信すると、それが文書データのネットワーク上における場所を指定した場所データであるか、文書データであるかを判別する判別手段を更に備え、前記解釈手段は、印刷指示データが文書データである場合、その文書データを解釈する。

【0015】また好ましくは、前記文書データは書式が不定の文書データであり、前記解釈手段は、前記文書デ

ータを解釈可能な形式に変換する変換手段を有し、該変換手段は、文書データの変換時に、書式情報を参照して印刷時の書式を確定する。

【0016】また好ましくは、前記変換手段は、文書データの書式をあらかじめ定義したスタイルシートに従って、前記文書データの書式を確定する。

【0017】また好ましくは、前記解釈手段は、前記文書データに埋め込むべきオブジェクトの指定を見い出すと、当該オブジェクトの指定に基づいて指定されたオブジェクトを獲得し、前記文書データの指定箇所に埋め込む。

【0018】また好ましくは、前記解釈手段は、獲得したオブジェクトを格納するキャッシュ手段を有し、前記オブジェクトの指定に基づいて指定されたオブジェクトを獲得する際に、まず前記キャッシュ手段を参照し、そこに格納されていればそのオブジェクトを前記文書データに埋め込み、格納されていなければ、指定された位置を参照してオブジェクトを獲得する。

【0019】また好ましくは、符号化データを復号する復号手段を更に備える。

【0020】また好ましくは、前記印刷手段はカラー印刷機能を有し、該カラー印刷機能によりカラー印刷するために、前記文書データのカラーと、前記カラー印刷機能により出力するカラー情報とを整合するカラーマッチング手段を更に備える。

【0021】あるいは、所定言語で記述された文書データを処理可能なプリンタとネットワークとに接続されたフォーマット変換装置であって、文書データを受信すると、その文書データを、当該文書に対して指定された書式情報を参照して前記プリンタが処理可能な形式に変換する変換手段と、前記変換手段による変換に際して、前記プリンタの機能情報を獲得する獲得手段とを備える。

【0022】また好ましくは、前記変換手段は、XMLまたはHTML形式の文書データを、SVG形式の文書データに変換する。

【0023】あるいは、文書データを処理可能な形式に変換するフォーマット変換装置とネットワークとに接続されたプリンタであって、印刷指示データを受信すると、それが文書データのネットワーク上における場所を指定した場所データである場合、指定された場所から文書データを獲得する獲得手段と、前記フォーマット変換装置に対して獲得した文書データを送信し、処理可能な形式に変換させる変換手段と、前記変換手段により変換された文書データを解釈する解釈手段と、前記解釈手段により解釈された文書データに基づいてレンダリングし、印刷する印刷手段とを備える。

【0024】さらに好ましくは、前記解釈手段は、前記文書データに埋め込むべきオブジェクトの指定を見い出すと、当該オブジェクトの指定に基づいて、指定されたオブジェクトを獲得し、前記文書データの指定箇所に埋

め込む。

【発明の詳細な説明】【第1の実施の形態】本発明の実施の形態であるXMLプリンタシステムについて以下に図面を参照して説明する。

【0025】図1は、本実施形態におけるXMLプリンタシステムの概要を示す図である。プリンタのクライアント101は、たとえばインターネットに接続して利用者が指定したロケーションのHTMLページを獲得し

(1)、ジョブチケットと呼ばれるプリント要求を、フォーマッティングサーバ100aとXMLプリンタ100bとを有するXMLプリントシステムへ発行する

(2)。この要求にはHTML文書そのものが含まれていても良いし、文書そのものの代わりに、文書の在処を指定するURLが含まれるものであってもよい。また、XMLプリントシステム100は、フォーマッティングサーバがバックエンドにあっても良いし、フロントエンドにあっても良い。いずれにしてもフロントエンドにある方の装置がジョブチケットの受け手となるが、それぞれの果たす機能そのものは変わらない。ここではフォーマッティングサーバ100aがフロントエンドにあるものとして説明する。

【0026】ジョブチケットに文書そのものが含まれる場合、すなわちダイレクト印刷の場合には、XMLプリンタ100bは、その文書をフォーマッティングサーバに対して送信してHTML文書からSVG文書に変換させる。SVGデータとは、HTMLと同様にタグを用いたSVGと呼ばれる言語で記述したデータであり、SVGはXMLを使用して定義されている。またSVGは1ページごとの文書の体裁を定義する機能を有している。図7は、XHTMLからSVGへと変換された文書の一例を示す図である。XHTML文書はレイアウトが固定化されておらず、表示領域を文書701の状態から文書703の状態に変えると、それにとまってレイアウトが変わってしまう。ところが別途指定されたレイアウト情報を参照してSVGへと変換すれば、文書702のように、出力レイアウトを確定できる。文書703は、SVGによってたとえば、文字の間隔や、画像のページ中における座標位置などが記述されている。

【0027】そしてXMLプリンタ100bが、フォーマッティングサーバ100aからSVG形式のデータを受信すると(4)、XMLプリンタ100bの有するSVGインタプリタにそのデータを解釈させて、印刷する。

【0028】一方、ジョブチケットに印刷すべきページのURLが含まれている場合、すなわちリファレンス印刷の場合には、フォーマッティングサーバ100aは、受信したジョブチケットを解析して、指定されたURLに基づいてウェブサーバ103からHTMLページを取得する(3)。そして、HTML形式のデータをSVG形式のデータに変換して、SVG形式のデータをXML

プリンタ100bに送信する(4)。以下は、ダイレクトプリンタの場合と同様の手順となる。

【0029】また、XMLプリンタ100bは、SVGデータの中に、オブジェクトを参照するタグが埋め込まれていた場合には、その参照先からオブジェクト、たとえばイメージデータをダウンロードして(5)、文書中の指定位置(タグの位置)にイメージを埋め込み、それを印刷する。この場合の参照先は、単なるファイル名の場合もあれば、ディレクトリのパスが記述されている場合も、URLの場合もある。それぞれの場合に応じて、参照先を認定して参照する。

【0030】図6は、ユーザにおける印刷画面の例を示す図(a)と図(b)である。図(a)は、ホストコンピュータのウェブブラウザにおける印刷画面の例であり、図(b)は、携帯端末における印刷画面の例である。印刷の際には、ホストコンピュータ(ウェブブラウザ)或いは携帯端末は、印刷画面が定義されたHTMLページをXMLプリンタから取り込んで、画面表示する。ユーザは、その画面を見ながら、必要な箇所に所望の値を入力する。すると、ホストコンピュータは、入力された値をジョブチケットに付加して、XMLプリンタに送信する。入力欄としては、プリンタアドレス、印刷すべき文書のURL、部数、用紙サイズ、用紙方向、マージン、使用するスタイルシート、オペレーション(プレビュー、ダイレクト印刷、リファレンス印刷の指定)等を指定できる。

【0031】オペレーションとして、ダイレクト印刷が指定されると、指定されたURLから読み出された文書がジョブチケットと共にXMLプリンタに送信される。ジョブチケットには、部数、用紙サイズ、用紙方向、マージン、使用するスタイルシート、オペレーション(プレビュー、ダイレクト印刷、リファレンス印刷の指定)の値がそれぞれ含まれている。

【0032】一方、リファレンス印刷が指定されると、指定された文書のURLがジョブチケットとしてプリンタに送信される。この場合も、ジョブチケットには、印刷すべき文書のURL、部数、用紙サイズ、用紙方向、マージン、使用するスタイルシート、オペレーション(プレビュー、ダイレクト印刷、リファレンス印刷の指定)の値がそれぞれ含まれている。

【0033】図2は、フォーマッティングサーバ202がバックエンドにある場合のXMLプリントシステムのブロック図である。ユーザのホストコンピュータ或いは携帯端末204はHTTPクライアントであり、たとえばウェブブラウザプログラム等が実行されている。XMLプリンタ201は、フォーマッティングサーバ202の有するHTTPサーバ202aやドキュメントサーバ203の有するHTTPサーバ103aとデータを交換するためのHTTPクライアント201aと、プリンタを制御するための、後述するXMLコントローラ201

bとを有する。ドキュメントサーバ203は、インターネットに接続された通常のHTTPサーバ（WWWサーバ）であればよい。このドキュメントサーバから提供される文書を、XMLプリンタ201により印刷する。

【0034】フォーマットサーバ202は、HTTPサーバ202aとXHTMLフォーマッタ202bとを含む。XHTMLフォーマッタ202bは、後述するように、HTML形式のデータやXML形式のデータをXHTML形式に変換し、それをSVG形式に変換する機能を有する。

【0035】図13はフォーマットサーバとして使用可能な汎用コンピュータのブロック図であり、図14は、XMLプリンタのブロック図である。

【0036】図13において、コンピュータ3000は、ROM3のプログラム用ROMに記憶された処理プログラム等に基づいて後述するフォーマットサーバとしての機能を遂行するためのCPU1を備え、システムバス4に接続される各デバイスをCPU1が統括的に制御する。RAM2は、CPU1の主メモリ、ワークエリア等として機能する。キーボードコントローラ（KBC）5は、キーボード9や不図示のポインティングデバイスからのキー入力を制御する。CRTコントローラ（CRTC）6は、CRTディスプレイ10の表示を制御する。ディスクコントローラ（DKC）7は、ブートプログラム、種々のアプリケーション、フォントデータ、ユーザファイル、編集ファイル等を記憶するハードディスク（HD）、フロッピー（登録商標）ディスク（FD）等の外部メモリ11とのアクセスを制御する。LAN制御部8はLANに制御されるが、フォーマットサーバはLANに限らず、公衆あるいは専用電話回線に接続するインターフェースを備える。なお、CPU1は、例えばRAM2上に設定された表示情報RAMへのアウトラインフォントの展開（ラスライズ）処理を実行し、CRT10上でのWYSIWYG（表示内容と印刷内容とを一致させる機能）を可能としている。また、CPU1はCRT10上の不図示のマウスカーソル等で指示されたコマンドに基づいて登録された種々のウィンドウを開き、種々のデータ処理を実行する。

【0037】図14においては、プリンタCPU12は、ROM13のプログラム用ROMに記憶された制御プログラム等に記憶された制御プログラム等に基づいてシステムバス15に接続される各種のデバイスとのアクセスを統括的に制御し、印刷部I/F16を介して接続される印刷部（プリンタエンジン）17に出力情報としての画像信号を出力する。CPU12は双方向I/F21を介してホストコンピュータとの通信処理が可能となっており、プリンタ内の情報等をホストコンピュータ3000に通知可能に構成されている。RAM19はCPU21の主メモリ、ワークエリア等として機能するRAMである。入力部18は、LANや専用回線、公衆回線

等を介してコンピュータ3000と接続され、文書データやURL等をホストコンピュータ3000に通知可能に構成されている。メモリコントローラ（MC）20は、ブートプログラム、種々のアプリケーション、フォントデータ、ユーザファイル、後述するフローチャートの手順のプログラムコード記憶するハードディスク（HD）、フロッピーディスク（FD）等の外部メモリ14とのアクセスを制御する。操作部1012は、表示パネルやキーボードを含んでおり、オペレータへの情報の提供や、オペレータからの指示の入力を行わせる。

【0038】＜XMLコントローラ＞図3はXMLプリンタ201におけるXMLコントローラ201bのブロック図である。

【0039】図において、ジョブチケットインタプリタ301は、発行されたジョブチケットに添付されたXMLデータの分析や、用紙サイズ、排紙ビン、レイアウト等の文書属性の設定などのほか、リファレンス印刷の場合には後述するドキュメントコレクタ302の起動を行う。

【0040】ドキュメントコレクタ302は、HTTPクライアントとIPPサーバとを含む。HTTPクライアントはTCP/IPネットワークに接続されており、指定されたURLのリソースを取得する。また、サーバにおける変換に必要な情報である用紙サイズ等を通知する。さらに、ドキュメントファイルマネージャ303を起動して、文書中のエラーの管理や、文書の階層構造、キャッシュの管理等を行わせる。

【0041】ドキュメントパーサ304は、SVG形式のデータ構造の分析と埋め込まれたデータ（例えば、イメージデータ）の取り出しを行う。また、機能ごとの各処理モジュールへの負荷の分散や、エラーイベント発生時のジョブ終了処理を行い、さらに、データがURLの際には、ドキュメントコレクタの起動も行う。

【0042】SVGインタプリタ305は、SVG形式のデータを解釈し、指定されたオブジェクトを指定されたように配置する機能を有する。そのために、オブジェクトが配置される座標などを、論理値からデバイス値へと変換するなどの処理を行う。インタプリタとしては他にCSSインタプリタも備えている。

【0043】なお、プリンタがカラー印刷機能を有する場合には、ドキュメントデータで指定された色をプリンタの色に合わせるために、いわゆるカラーマッチング機能をSVGインタプリタは有している。

【0044】XMLグラフィックライブラリ307は、レンダラ308には不足した描画機能を提供し、レンダラ依存部分を吸収する機能を有する。XMLグラフィックライブラリ307によって、レンダラ308によるレンダリング処理が可能な形式のデータが生成される。

【0045】レンダラ308は、ビットマップ形式のデータを生成して、プリンタエンジン309へ送出し、プ

リントさせる。

【0046】デコーダ310は、JPEGやGIFといった圧縮イメージを復号する。

【0047】キャパビリティデスクリプタ311は、フォーマットサーバに対して、プリンタの機能（画像処理機能など）や能力（解像度など）等に関する情報を送信する。

【0048】以上の構成によって、ジョブチケットを解釈し、必要な文書やイメージ等のリソース（HTMLあるいはXML形式）を獲得して、必要に応じてフォーマットサーバによりSVG形式へと変換を行わせ、変換されたデータをレンダリングし、それを印刷することができる。

【0049】＜フォーマットサーバの構成＞図4は、フォーマットサーバ202のブロック図である。

【0050】フォーマットサーバ202において、ドキュメントリクエストサーバ405は、ドキュメントコレクタ302から送られる用紙サイズ等のフォーマットに必要な情報や、リファレンス印刷であればドキュメントのURLを、ダイレクト印刷であればXMLやHTML形式のデータを受信する。また、ドキュメントリクエストサーバ405は、ドキュメントコレクタ302に対して、XMLやHTMLから変換された、SVGのタグセットを利用して記述されたドキュメントファイルや画像データファイルを送信する。

【0051】トランスレータ402は、ファイルシステム403から必要に応じてスタイルシート等を読み込んで、HTMLやXMLデータをXHTML形式に変換し、そのデータはさらにフォーマッタ401によって、SVG形式に変換される。XHTML形式は、先に説明したようにXMLによって定義されたHTMLであることから、HTMLからの変換も、XMLからの変換も比較的容易である。

【0052】また、SVGもXMLによって定義されている形式であるが、この変換は、キャパビリティレジスタ404により受信されたプリンタの機能や能力等、またドキュメントリクエストサーバ405により受信したサイズ情報等を参照して行われる。たとえば、XHTMLには印刷の際のページなる概念がないために、SVGへの変換の際にはページ区切りをしなければならない。このとき、区切り位置の決定のためなどに用紙サイズや、解像度などの情報が参照される。

【0053】このようにして変換されたSVG形式のデータは、ドキュメントリクエストサーバ405に渡されて、そこからXMLプリンタのXMLコントローラ101bに送信される。

【0054】こうしてフォーマットサーバ202により、HTMLあるいはXMLで記述されたデータはSVGに変換され、XMLプリンタ201に入力され

る。

【0055】XMLプリンタ201に入力されたSVGのデータは、先に説明したとおり、ドキュメントパーサ304で分析され、埋込みオブジェクトがあればそれを読み込んで文書に埋め込み、指定された書式に整形された上で印刷出力される。

【0056】＜印刷手順＞図5は、XMLプリンタとフォーマットサーバ、ドキュメントサーバの間における、リファレンス印刷時のメッセージの交換手順を示している。

【0057】まず、ジョブチケットがXMLプリンタに対して発行されると、XMLプリンタは指定された文書のURLに従って、ドキュメントサーバからの文書の読み出しを行い（502）、指定されたHTMLドキュメントを獲得する（504）。XMLプリンタはいったんそれを格納した後、フォーマットサーバに対して、ドキュメントサーバから獲得したHTMLドキュメントを送信し、SVG形式に変換させる（506）。フォーマットサーバは、変換時に必要となる用紙サイズなどの情報や、プリンタの性能に関するたとえば解像度などの情報を、XMLプリンタに対して要求し（508）、獲得する（510）。

【0058】フォーマットサーバはそれらの情報を参照してHTMLドキュメントをSVGドキュメントに変換し、XMLプリンタに返送する（512）。

【0059】XMLプリンタは、受信したSVGドキュメントを解析して、埋め込まれたURLがあれば、それによって指定されるオブジェクトを獲得すべく、ドキュメントサーバにアクセスし（514）、オブジェクトを獲得する（516）。

【0060】上記シーケンスにおいて、XMLプリンタ及びフォーマットサーバそれぞれの手順は次のようになる。図11はユーザからジョブチケットを受信したXMLプリンタの処理手順のフローチャートを示し、図12は、XMLプリンタからXMLあるいはHTMLドキュメントを受信したフォーマットサーバの処理手順のフローチャートを示している。

【0061】図11において、ジョブチケットがXMLプリンタに対して発行されると、XMLプリンタはそれを受信し、指定されたオペレーションがリファレンス印刷であるか、ダイレクト印刷であるか判定する（ステップS1100）。リファレンス印刷であれば、HTTPクライアント機能を用いて、URLで指定されたドキュメントをドキュメントサーバから読み込む（ステップS1101）。なお、このとき、まずキャッシュを参照して、キャッシュされている文書やオブジェクトは、キャッシュから読み出す。

【0062】ドキュメントが獲得できた場合には、リファレンス印刷の場合には獲得したHTML文書を、ダイレクト印刷の場合には、ジョブチケット共に受信したX

10

20

30

40

50



ML文書あるいはHTML文書を、フォーマットサーバに送信する(ステップS1102)。

【0063】この後、フォーマットサーバとの間で、必要に応じてプリンタキャパビリティ情報の交換が行われた後、フォーマットサーバからSVGドキュメントを受信する(ステップS1103)。そして、そのドキュメントを分析し(ステップS1104)、埋込みオブジェクトがあるか判定して(ステップS1105)、オブジェクトがあれば、そのオブジェクトがHTMLドキュメントまたはXMLドキュメントのいずれかであるか、あるいはHTMLドキュメントやXMLドキュメントではない画像等であるかが判定される(ステップS1107)。何れでもない場合、たとえばビットマップ画像やJPEG、GIF画像等であれば、そのオブジェクトをURLに基づいて取得し、再び埋込みオブジェクトの判定を繰り返す(ステップS1105)。このとき、取得した文書やオブジェクトは、ハードディスク等のキャッシュ領域キャッシュしておき、ステップS1001において参照する。

【0064】埋込みオブジェクトの処理を終えたなら、そのSVGドキュメントをレンダリングしてビットマップ化し、プリンタエンジンから印刷させる(ステップS1106)。

【0065】図12においては、まず、フォーマットサーバは、XMLプリンタからXMLあるいはHTMLドキュメントを受信すると、プリンタキャパビリティ情報をXMLプリンタのコントローラに要求し、取得する(ステップS1201)。そして受信したHTMLドキュメントをXHTMLドキュメントに変換する(ステップS1202)。この際、ジョブチケットで指定されたスタイルシートを参照し、そのスタイルシートで定義された文書の書式に、HTMLドキュメントをはめ込んで、新たな形式のXHTMLドキュメントとする。スタイルシートでは、たとえば文字の書体やサイズ、段落分けの仕方、画像のレイアウト等が定義される。

【0066】いったんXHTMLに変換されたドキュメントは、ステップS1201で取得したプリンタの機能や性能を参照してSVGドキュメントに変換される(ステップS1203)。

【0067】以上のようにして、本来表示されるべきものとして定義されているHTMLドキュメントを、スタイルシートやプリンタキャパビリティ情報を参照することで、印刷されるページ単位のSVGドキュメントに変換することができる。

【0068】このように、HTMLやXHTMLで記述された文書を、XMLで定義されたSVG形式に変換することで、そのままプリンタによって印刷可能となる。このシステムでは、従来の印刷システムのように、ホストコンピュータによって文書を完成させ、その文書をプリンタで解釈可能な形式に変換しておく必要がない。こ

のシステムでは、文書は、その中に埋め込むべきオブジェクトが、URLやファイル名といった参照データであっても、プリンタが、それら参照データからオブジェクトを収集して文書を完成させ印刷させることができる。

【0069】そのため、従来のプリンタドライバが不要となり、印刷に際しての、ホストコンピュータにおける出力処理がなくなり、ホストの負荷が軽減される。

【0070】また、文書そのものをプリンタに渡す必要すらなく、URL等の参照データをプリンタに渡すことでリファレンス印刷を行わせることができる。

【0071】さらに埋め込まれるオブジェクトが文書から独立しているために、そのオブジェクトを変える場合でも文書全体の編集し直しなどが不要であり、オブジェクトを入れ替えておくだけで済む。そのために、オブジェクトが画像であれば、表示と印刷とで異なる解像度の画像を用意することなどもできる。

【0072】さらに、文書やオブジェクトをキャッシュしておくことで、キャッシュに格納してある限りは通信を介してオブジェクトの取得をおこなわずに済む。

【0073】さらに、スタイルシートを利用することで、ひとつの文書であっても、スタイルシートを変えることでレイアウトを変更して印刷することが可能である。

【0074】さらに、JPEGやGIFといった符号化データを復号する機能をプリンタに内蔵するために、ホストコンピュータにおける負荷を軽減できる。

【0075】<印刷手順のバリエーション>図8は、上記のような構成により行なわれるリファレンス印刷の様子を示す模式図である。図8においては、ジョブチケットがXMLプリンタに送信されると(1)、XMLプリンタはそれをドキュメントサーバ兼フォーマットサーバに転送し(2)、ドキュメントサーバ兼フォーマットサーバは受信したURLからドキュメントの本体を獲得する(3)。ドキュメントサーバ兼フォーマットサーバがそのドキュメントを受信すると、SVG形式に変換して(4)、XMLプリンタに送信して印刷させる(5)。

【0076】上述したシステムでは、XMLプリンタが文書の獲得を行っていたが、このように、ドキュメントサーバ兼フォーマットサーバに文書獲得及びSVG形式への変換の処理を行わせ、プリンタはジョブチケットの受信と印刷を行うように構成することもできる。このシステム構成においては、プリンタはフォーマットサーバからSVG文書が入力されるのを待って印刷するだけでよい。図11、図12の処理はすべてフォーマットサーバにより行われる。

【0077】図9はダイレクト印刷の他の形態を示す模式図である。XML形式のドキュメントがワードプロセッサなどから出力され、その文書をユーザが端末で受信すると、ユーザはその文書に書式等の指定を追加してサ



サーバ（図 9 ではフォーマットサーバをかねる）に転送する。これがジョブチケットとなる（1）。サーバはそれを XML プリンタに転送し（2）、XML プリンタはフォーマットサーバに送信して SVG 形式に変換させる（3）。フォーマットサーバは SVG に変換した文書を XML プリンタに送信して印刷させる（4）。また、ユーザ端末は、XML 形式のドキュメントを電子メールに添付して、サーバに送信してもよい。サーバは、その電子メールを受信して、添付されたドキュメントを SVG 形式のデータに変換して、XML プリンタに送信する。

【0078】以上のように、フォーマットサーバと XML プリンタとの機能分担が変わることはあっても、本実施例で示したようなシステムとしての機能や効果にかかわるところはない。

【0079】[その他の実施の形態] なお、本発明の目的は、前述した実施形態の機能を実現するソフトウェアのプログラムコードを記録した記憶媒体を、システムあるいは装置に供給し、そのシステムあるいは装置のコンピュータ（または CPU や MPU）が記憶媒体に格納されたプログラムコードを読み出し実行することによっても達成される。

【0080】この場合、記憶媒体から読み出されたプログラムコード自体が本発明の新規な機能を実現することになり、そのプログラムコードに記憶した記憶媒体は本発明を構成することになる。

【0081】また、デバイス情報データは、画像処理装置及び画像データ展開装置に内蔵されている HDD、外部接続されている記憶媒体、画像データ展開装置からアクセス可能なサーバ等に保持されていても構わない。さらに、デバイス情報データはユーザが任意に設定したものを 사용할ことが可能であっても構わない。

【0082】プログラムコードを供給するための記憶媒体としては、例えば、フロッピーディスク、ハードディスク、光ディスク、光磁気ディスク、CD-ROM、CD-R、磁気テープ、不揮発性のメモ리카ード、ROM などを用いることができる。

【0083】また、コンピュータが読み出したプログラムコードを実行することにより、前述した実施形態の機能が実現されるだけでなく、そのプログラムコードの指示に基づき、コンピュータ上で稼動している OS（オペレーティングシステム）などが、実際の処理の一部または全部を行い、その処理によって前述した実施の形態の機能が実現される場合も含まれる。

【0084】さらに、記憶媒体から読み出されたプログラムコードが、コンピュータに挿入された機能拡張ボードやコンピュータに接続された機能拡張ユニットに備わるメモリに書き込まれた後、そのプログラムコードの指示に基づき、その機能拡張ボードや機能拡張ユニットに備わる CPU などが実際の処理の一部または全部を行

い、その処理によって前述した実施形態の機能が実現される場合も含まれる。

【0085】本発明を上記記憶媒体に適用する場合、その記憶媒体には、先に説明した（図 11 乃至図 12 に示す）フローチャートに対応するプログラムコードが格納されることになる。

【0086】

【発明の効果】以上説明したように本発明によれば、標準化された言語で記述された文書データをそのままの形式で解釈でき、印刷できるプリンタシステムが実現できる。

【0087】さらに、文書中に埋め込まれたオブジェクトが、URL やファイル名といった参照データであっても、それら参照データからオブジェクトを収集して文書を完成させて印刷させることができる。

【0088】さらに、文書そのものではなく、参照データを受け取ることで印刷が可能である。

【0089】さらに、ひとつの文書について、簡単にレイアウトを変更して印刷することが可能である。

【図面の簡単な説明】

【図 1】本実施形態における XML プリンタシステムの概要を示す図である。

【図 2】フォーマットサーバ 202 がバックエンドにある XML プリントシステムのブロック図である。

【図 3】XML プリンタ 201 における XML コントローラ 201b のブロック図である。

【図 4】フォーマットサーバ 202 のブロック図である。

【図 5】XML プリンタとフォーマットサーバ、ドキュメントサーバの間における、リファレンス印刷時のメッセージの交換手順を示す図である。

【図 6】ユーザにおける印刷画面の例を示す図（a）と、ジョブチケットの構成を示す一例の図（b）である。

【図 7】XHTML から SVG へと変換された文書の一例を示す図である。

【図 8】リファレンス印刷の様子を示す模式図である。

【図 9】ダイレクト印刷の他の形態を示す模式図である。

【図 10】拠点システムとセンタシステムとの間で行われる、デバイスへの設定値のダウンロードの手順を説明するためのフローチャートである。


【図 11】ユーザからジョブチケットを受信した XML プリンタの処理手順のフローチャートである。

【図 12】XML プリンタから XML あるいは HTML ドキュメントを受信したフォーマットサーバの処理手順のフローチャートである。


【図 13】フォーマットサーバとして使用可能な汎用コンピュータのブロック図である。

【図 14】XML プリンタのブロック図である。


【図1】

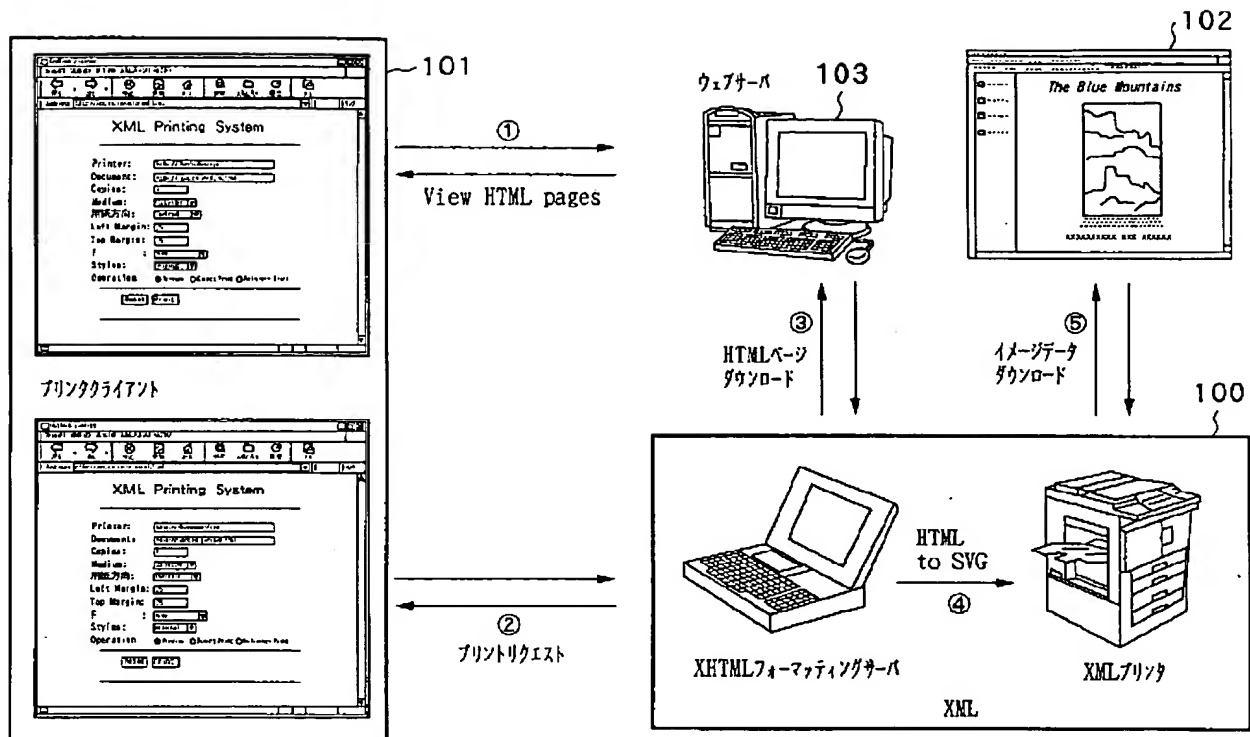


【図2】

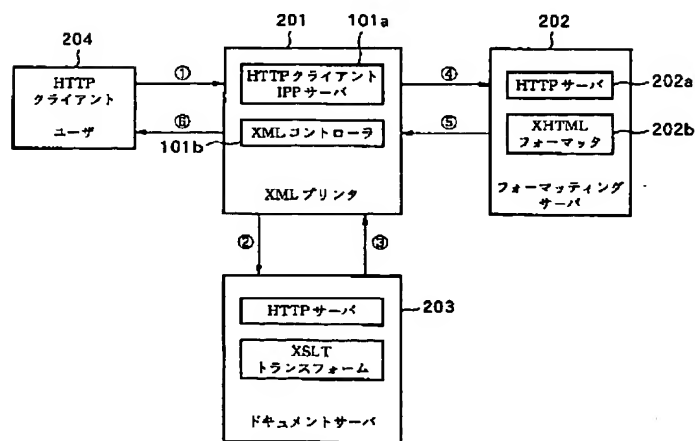


【図13】

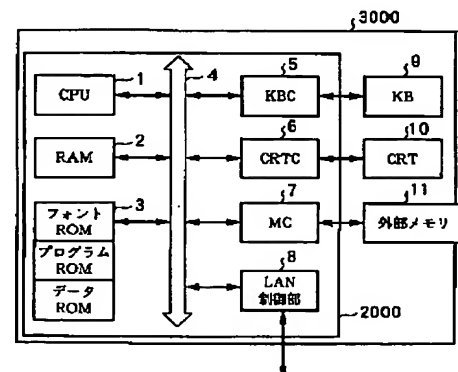


【図3】

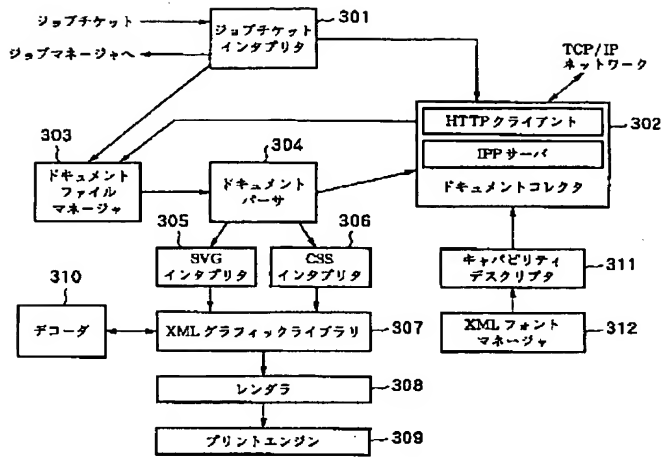


【図14】

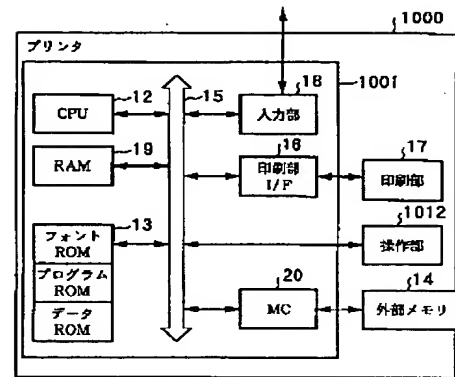

【図4】

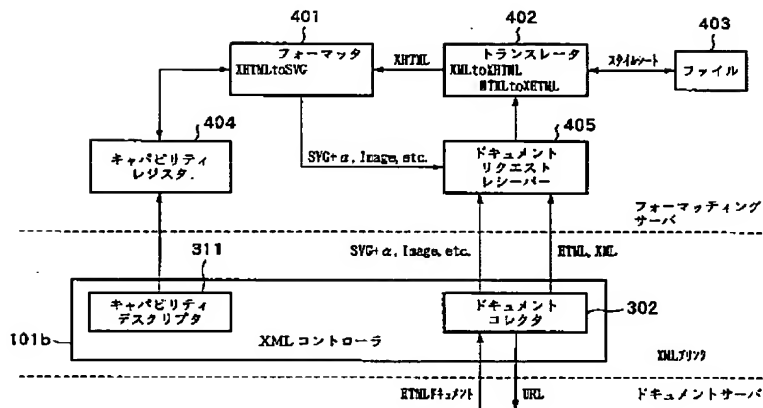


【図5】

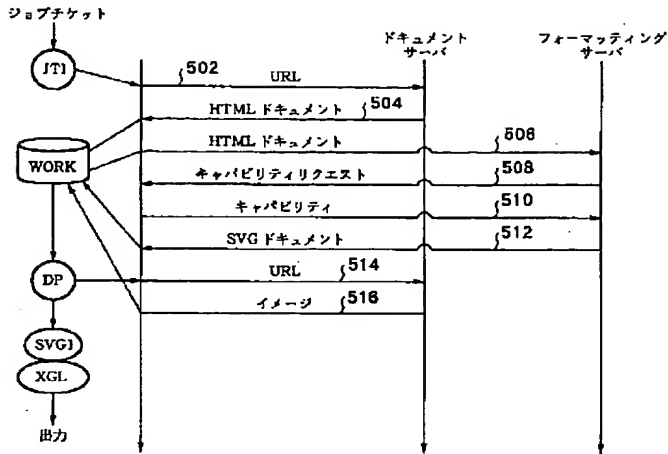

【図6】


(a)

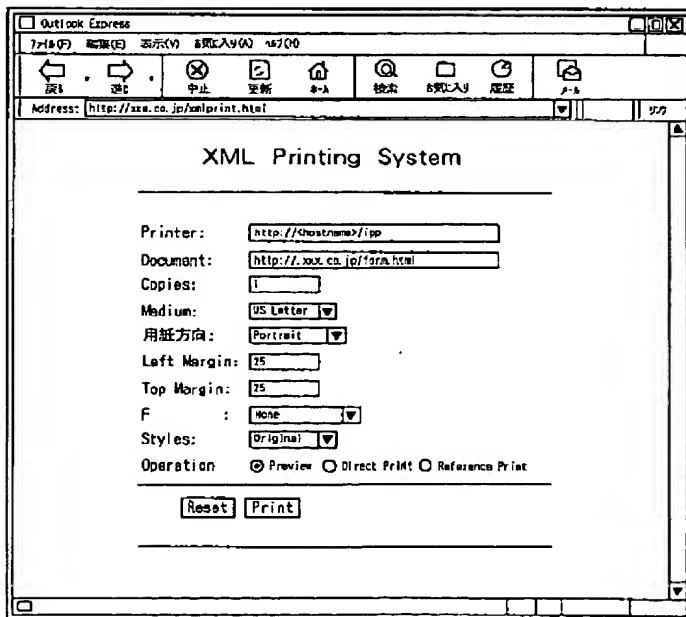


(b)

Ganon Expo 2000	
<b>XML Printing System</b>	
●Printer : 192.168.0.1/ipp ●Page : 192.168.0.3/Home.html ●Copies : 1 ●Style : <input checked="" type="radio"/> Plain <input type="radio"/> Table <input type="radio"/> Cards <input type="radio"/> Columns <input type="radio"/> Poster <input type="radio"/> Booklet	
<input type="button" value="Reset"/> <input type="button" value="Print"/>	
(c)2000 Ganon, Inc.	
選択 <input type="button" value="Home"/> <input type="button" value="Back"/> <input type="button" value="Forward"/> <input type="button" value="Stop"/> <input type="button" value="Print"/> <input type="button" value="a"/>	


【図7】

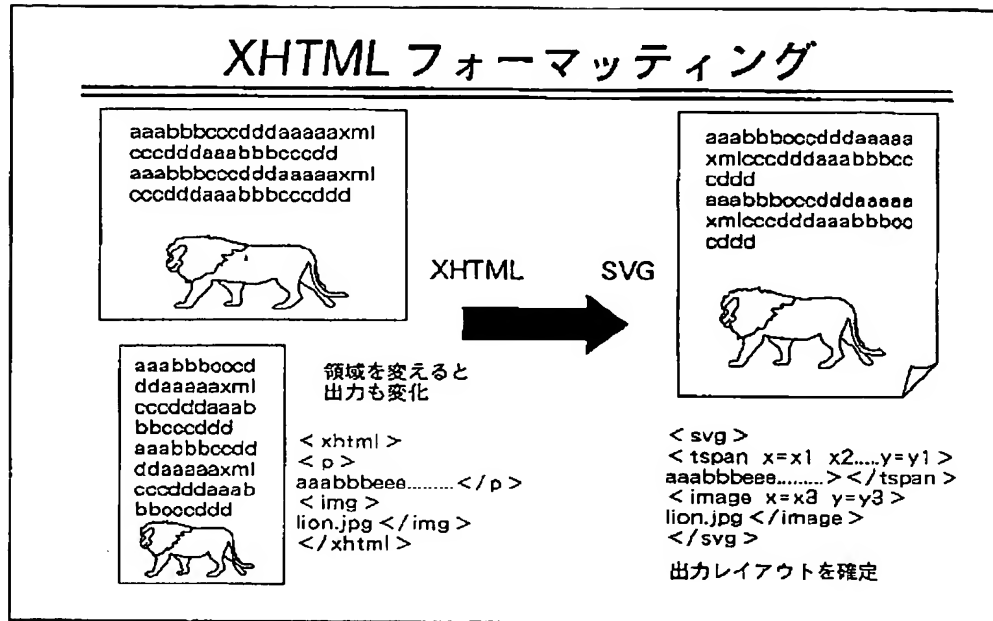


【図8】

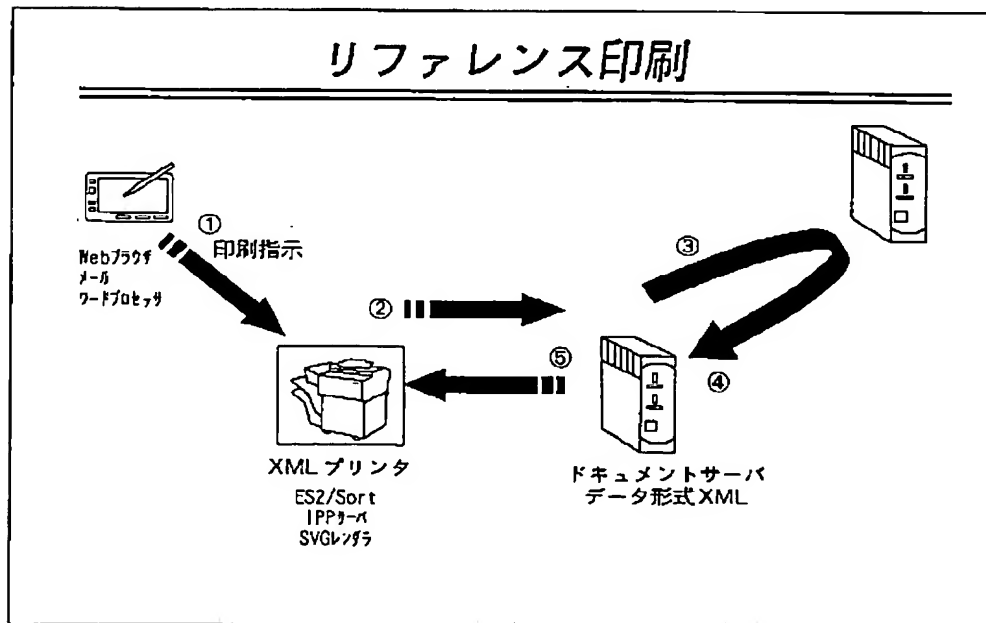

【図9】

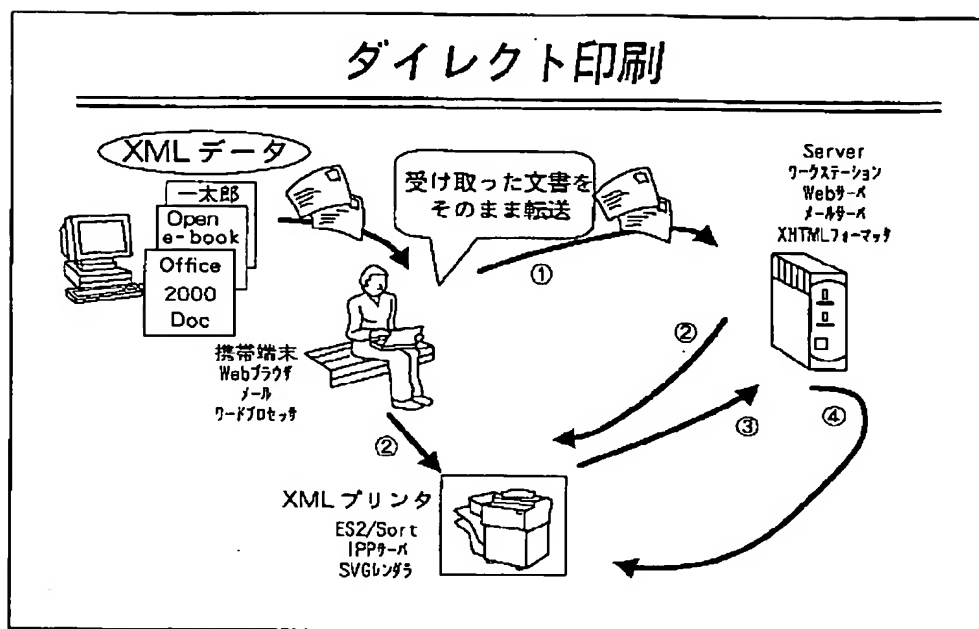


【図10】

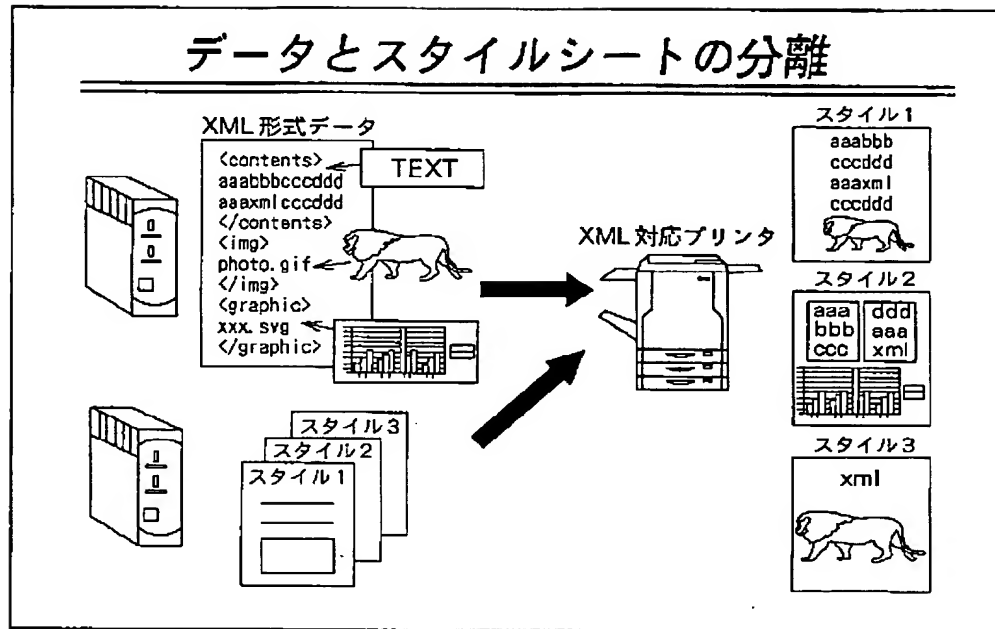




【図11】

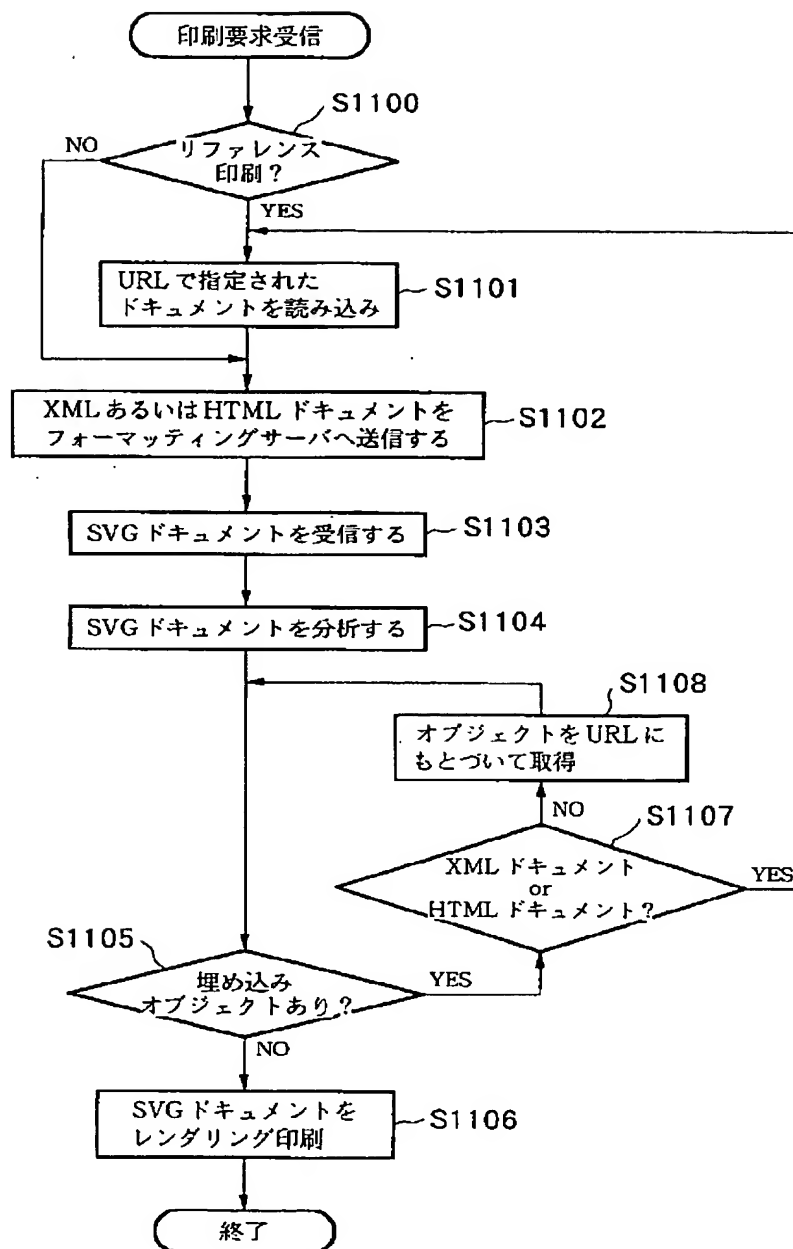

【図 12】

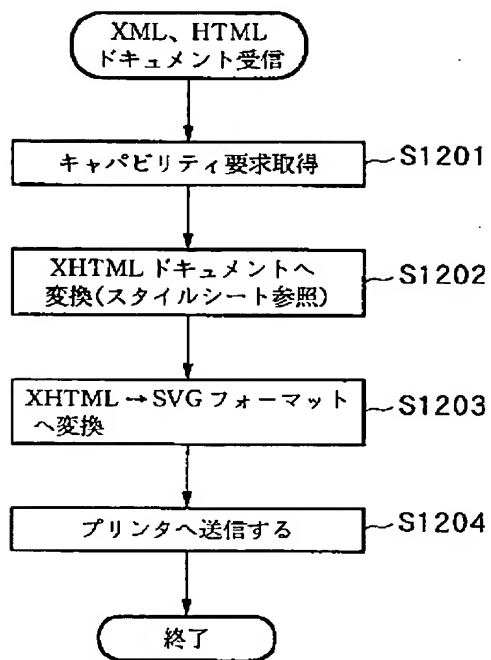

# PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2002-091726

(43)Date of publication of application : 29.03.2002

(51)Int.Cl. G06F 3/12  
B41J 5/30  
B41J 29/38


(21)Application number : 2000-277247 (71)Applicant : CANON INC  
(22)Date of filing : 12.09.2000 (72)Inventor : FUJISAWA ATSUSHI

## (54) PRINTER SYSTEM

### (57)Abstract:

PROBLEM TO BE SOLVED: To make a printer system print an XML document as it is.

SOLUTION: By designating the URL of the document from a print client 101 to an XML printer 100b, the HTML document provided by a document server 103 is read out. The XML printer 100b transforms that document into an SVG form by a formatting server 100a, interprets that document, downloads an image if needed, and prints the document while integrating that image therein.

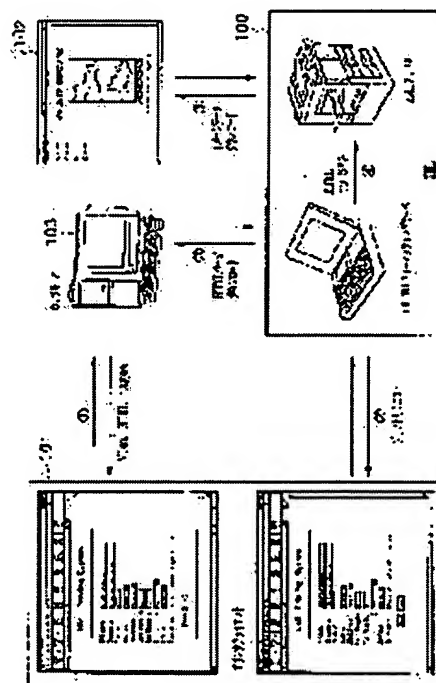

## LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's  
decision of rejection]

[Date of requesting appeal against examiner's  
decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office

\* NOTICES \*

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

## DETAILED DESCRIPTION

### [Detailed Description of the Invention]

[0001]

[Field of the Invention] This invention relates to the printer system for printing the document described by the markup language which defines the appearance of a document by specifying the logical structure of objects, such as an alphabetic character and an image, especially as it is about the printer system for printing the document data created with the host computer.

[0002]

[Description of the Prior Art] In recent years, by the spread of the Internet, many documents are described by the markup language called HTML, are offered by the WWW server (HTTP server), and are accessible from the terminal linked to the Internet. The document described in HTML is read by the application called a web browser, and a web browser is interpreting the tag embedded into the document, and arranges and displays a document and an image on a terminal screen. The object in a document may be specified by the identifier of not the object itself but the location which it set, and an object in that case. In such a case, a web browser accesses the specified location (described by the descriptor called URL), reads the specified object, and compounds and displays it on a document.

[0003] In case a host computer prints this HTML document, it sends out to a printer the image data (image which is the aggregate of an object) formed of the web browser like the usual document using the function of an operating system. Image data is changed into the format which can be interpreted by the printer by the printer driver corresponding to the printer used in that case.

[0004] Thus, the process of changing into the format which can further be interpreted by the printer after the host computer collected all required objects and changes into a display format, in order to print an HTML document was stepped on.

[0005] On the other hand, a markup language called XML which extended HTML is also spreading. XML can extend an original tag which adds semantics to assignment of the expression approach, or the character string in a text by expressing the structure of a document with a document type definition file called DTD (document type definition). A markup language called XHTML which defined HTML by this XML is also being used.

[0006]

[Problem(s) to be Solved by the Invention] Thus, for printing of an HTML document, the host computer had to perform many processings of collection and conversion of data, and its burden was large.

[0007] Moreover, the standardization is advanced, markup languages, such as XML, HTML, and XHTML, are not concerned with an operating system or an application program, but if it is the document described by these markup languages, the organization against which the compatibility is secured is ready. If it is the language which became independent of such hardware and an operating system with very high compatibility, and application, even if it will not be changed into the format that a printer can be interpreted by the host computer, the printer which interprets and prints the language itself is also usable under the environment of the class from which many differ. With such a printer, the burden of a host computer is mitigable increasingly.

[0008] This invention was accomplished in view of the above-mentioned conventional example, and the document data described in the standardized language can be interpreted in a format as it is, and it aims at offering the printer system which can be printed.

[0009] Furthermore, even if the objects embedded into the document are reference data, such as URL and a file name, it aims at offering the printer system which can collect objects from these reference data, can be made to be able to complete a document, and can be made to print.

[0010] Furthermore, it aims at offering the printer system which can be printed by receiving not the document itself but reference data.

[0011] Furthermore, it aims at offering the printer system which can change and print a layout simply about one document.

[0012]

[Means for Solving the Problem] In order to attain the above-mentioned purpose, this invention consists of the following configurations.

[0013] When it is the printer system connected to a network, and printing directions data receive and it is location data which specified the location on the network of document data, it has an acquisition means gain document data from the specified location, an interpretation means interpret the document data which gained with said acquisition means, and a printing means carry out a rendering based on the document data interpreted by said interpretation means, and print.

[0014] Moreover, preferably, it has further a distinction means to distinguish whether it is location data with which it specified the location on the network of document data when printing directions data are received, or it is document data, and said interpretation means interprets the document data, when printing directions data are document data.

[0015] Moreover, preferably, format is document data of an indeterminate, said document data have a conversion means to change said interpretation means into the format that said document data can be interpreted, and, as for this conversion means, the format at the time of printing is decided with reference to form information at the time of conversion of document data.

[0016] Moreover, said conversion means decides the format of said document data preferably according to the style sheet which defined the format of document data beforehand.

[0017] Moreover, preferably, if assignment of the object which should be embedded to said document data is found out, said interpretation means will gain the object specified based on assignment of the object concerned, and will embed it in the appointed place of said document data.

[0018] Moreover, it has a cache means to store the object which acquired said interpretation means preferably, and first, the object is embedded to said document data, and in case the object specified based on assignment of said object is gained, if stored there with reference to said cache means, if not stored, an object will be gained with reference to the specified location.

[0019] Moreover, it has preferably a decode means to decode coded data, further.

[0020] Moreover, preferably, said printing means is further equipped with a color matching means to adjust the color of said document data, and the color information outputted by said color print facility, in order to have a color print facility and to color-print by this color print facility.

[0021] Or it is format-conversion equipment connected to the printer which can process the document data described in predetermined language, and a network, and if document data receive, it will have a conversion means change the document data into the format that said printer can process, with reference to the form information specified to the document concerned, and an acquisition means acquire the functional information on said printer on the occasion of conversion by said conversion means.

[0022] Moreover, said conversion means changes the document data of XML or a HTML format into the document data of a SVG format preferably.

[0023] Or if it is the printer connected to the format conversion equipment changed into the format that document data can be processed, and a network and printing directions data are received An acquisition means to gain document data from the specified location when it is location data which specified the location on the network of document data, The conversion means which transmits the document data gained to said format conversion equipment, and is transformed to the format which can be processed, It

has an interpretation means to interpret the document data changed by said conversion means, and a printing means to carry out a rendering based on the document data interpreted by said interpretation means, and to print.

[0024] Still more preferably, if assignment of the object which should be embedded to said document data is found out, said interpretation means will gain the specified object based on assignment of the object concerned, and will embed it in the appointed place of said document data.

[Detailed description] The XML printer system which is the gestalt of operation of [gestalt of the 1st operation] this invention is explained with reference to a drawing below.

[0025] Drawing 1 is drawing showing the outline of the XML printer system in this operation gestalt. The client 101 of a printer publishes the print request which gains the HTML page of the location which connected to the Internet and the user specified, and is called (1) and a job ticket to the XML print system which has formatting server 100a and XML printer 100b (2). The HTML document itself may be contained in this demand, and URL which specifies the whereabouts of a document may be contained instead of the document itself. Moreover, the XML print system 100 may have a formatting server in a back-end, and it may be in a front end. Anyway, although the equipment of the direction in a front end serves as a sink of a job ticket, each function itself to achieve does not change. Here, formatting server 100a explains as a thing in a front end.

[0026] When the document itself is contained in a job ticket (i.e., when it is direct printing), XML printer 100b transmits the document to a formatting server, and is made to change it into a SVG document from an HTML document. It is data described in the language called SVG using a tag like HTML, and SVG is defined as SVG data using XML. Moreover, SVG has the function to define the appearance of the document in every page. Drawing 7 is drawing showing an example of the document changed into SVG from XHTML. An XHTML document will change a layout in connection with it, if a layout is not fixed but a viewing area is changed into the condition of a document 703 from the condition of a document 701. However, if it changes into SVG with reference to the layout information specified separately, an output layout can be decided like a document 702. As for the document 703, spacing of an alphabetic character, the coordinate location in the page of an image, etc. are described by SVG.

[0027] And if XML printer 100b receives the data of a SVG format from formatting server 100a, it will make the SVG interpreter which (4) XML printer 100b has interpret the data, and will print.

[0028] When URL of the page which should be printed at a job ticket is contained on the other hand (i.e., when it is reference printing), formatting server 100a analyzes the received job ticket, and acquires a HTML page from a web server 103 based on specified URL (3). And the data of a HTML format are changed into the data of a SVG format, and the data of a SVG format are transmitted to XML printer 100b (4). The following serves as the same procedure as the case of a direct printer.

[0029] Moreover, when the tag which refers to an object is embedded in SVG data, XML printer 100b downloads an object, for example, an image data, from the reference place, embeds an image in the specified location in (5) and a document (location of a tag), and prints it. The reference place in this case may be URL, also when [ if it is, ] the pass of a directory is described, the case of a mere file name, and. A reference place is authorized and referred to according to each case.

[0030] Drawing 6 is drawing (a) and drawing (b) showing the example of the printing screen in a user. Drawing (a) is the example of the printing screen in the web browser of a host computer, and drawing (b) is the example of the printing screen in a personal digital assistant. In the case of printing, a host computer (web browser) \*\*\*\* personal digital assistant incorporates and carries out a screen display of the HTML page by which the printing screen was defined from an XML printer. A user inputs a desired value into a required part, looking at the screen. Then, a host computer adds the inputted value to a job ticket, and transmits it to an XML printer. As an input column, the printer address, URL of the document which should be printed, number of copies, a paper size, page orientation, a margin, the style sheet to be used, operation (assignment of preview, direct printing, and reference printing), etc. can be specified.

[0031] As operation, assignment of direct printing transmits a job ticket for the document read from



specified URL to an XML printer. The value of number of copies, a paper size, page orientation, a margin, the style sheet to be used, and operation (assignment of preview, direct printing, and reference printing) is included in the job ticket, respectively.

[0032] On the other hand, assignment of reference printing transmits URL of the specified document to a printer as a job ticket. Also in this case, the value of URL of the document which should be printed, number of copies, a paper size, page orientation, a margin, the style sheet to be used, and operation (assignment of preview, direct printing, and reference printing) is included in the job ticket, respectively.

[0033] Drawing 2 is the block diagram of an XML print system in case the formatting server 202 is in a back-end. A user's host computer or personal digital assistant 204 is a HTTP client, for example, the web browser program etc. is performed. The XML printer 201 has HTTP client 201a for exchanging HTTP server 103a and data which HTTP server 202a which the formatting server 202 has, and the document server 203 have, and XML controller 201b later mentioned for controlling a printer. The document server 203 should just be the usual HTTP server (WWW server) connected to the Internet. The document offered from this document server is printed by the XML printer 201.

[0034] The formatting server 202 contains HTTP server 202a and XHTML formatter 202b. XHTML formatter 202b has the function to change the data of a HTML format, and the data of an XML format into an XHTML format, and to change it into a SVG format so that it may mention later.

[0035] Drawing 13 is the block diagram of a general purpose computer usable as a formatting server, and drawing 14 is the block diagram of an XML printer.

[0036] In drawing 13 , a computer 3000 is equipped with CPU1 for carrying out the function as a formatting server later mentioned based on the processing program memorized by ROM for a program of ROM3, and CPU1 controls in generalization each device connected to a system bus 4. RAM2 functions as the main memory of CPU1, a work area, etc. The keyboard controller (KBC) 5 controls the key input from a keyboard 9 or a non-illustrated pointing device. CRT controller (CRTC) 6 controls the display of CRT display 10. A disk controller (DKC) 7 controls access with the external memory 11 which memorizes a boot program, various applications, font data, a user file, an edit file, etc., such as a hard disk (HD) and a floppy (trademark) disk (FD). A formatting server is equipped with the interface not only linked to LAN but the public or a leased telephone circuit although the LAN control section 8 is controlled by LAN. In addition, CPU1 performs expansion (rasterize) processing of the outline font of display information RAM HE set up for example, on RAM2, and makes possible WYSIWYG (function which makes in agreement the contents of a display, and the contents of printing) on CRT10. Moreover, CPU1 opens the various windows registered based on the command directed by the mouse cursor which is not illustrated on CRT10, and performs various data processing.

[0037] In drawing 14 , a printer CPU 12 controls in generalization access with various kinds of devices connected to a system bus 15 based on the control program memorized by the control program memorized by ROM for a program of ROM13, and outputs the picture signal as a print-out to the printing section (printer engine) 17 connected through printing section I/F16. The communications processing with a host computer of CPU12 has become possible through bidirectional I/F21, and the host computer 3000 constitutes the information in a printer etc. possible [ a notice ]. RAM19 is RAM which functions as the main memory of CPU21, a work area, etc. It connects with a computer 3000 through LAN, a dedicated line, a public line, etc., and the input section 18 is constituted by the host computer 3000 possible [ a notice ] in document data, URL, etc. The memory controller (MC) 20 controls access with external memory 14, such as a boot program, various applications, font data, a user file, a hard disk (HD) in which the procedure of the flow chart mentioned later carries out program code storage, and a floppy disk (FD). The control unit 1012 contains the display panel and the keyboard, and makes offer of the information to an operator, and the directions from an operator input.

[0038] <XML controller> drawing 3 is the block diagram of XML controller 201b in the XML printer 201.

[0039] In reference printing besides being a setup of document attributes, such as analysis of the XML data attached to the published job ticket, and a paper size, a delivery bottle, a layout, etc., in drawing, the

job ticket interpreter 301 starts the document collector 302 mentioned later.

[0040] The document collector 302 contains a HTTP client and an IPP server. It connects with the TCP/IP network and a HTTP client acquires the resource of specified URL. Moreover, the paper size which is information required for the conversion in a server is notified. Furthermore, the document file manager 303 is started and management of the error in a document, the layered structure of a document, management of a cache, etc. are made to perform.

[0041] The document parser 304 performs analysis of the DS of a SVG format, and ejection of the embedded data (for example, image data). Moreover, distribution of the load to each processing module for every function and the job post process at the time of error event generating are performed, and further, in case data are URL, starting of a document collector is also performed.

[0042] The SVG interpreter 305 has the function arranged as [ the specified object ] the data of a SVG format were interpreted and it was specified. Therefore, it processes changing into a device value the coordinate by which an object is arranged from a logical value etc. Others are equipped also with the CSS interpreter as an interpreter.

[0043] In addition, when a printer has a color print facility, in order to double with the color of a printer the color specified by document data, the SVG interpreter has the so-called color matching function.

[0044] The XML graphic library 307 provides a renderer 308 with the drawing function which ran short, and has the function which absorbs a renderer dependence part. The data of the format in which the rendering processing by the renderer 308 is possible are generated by the XML graphic library 307.

[0045] A renderer 308 generates the data of a bit map format, and is made to send out and print them on printer engine 309.

[0046] A decoder 310 decodes compression images, such as JPEG and GIF.

[0047] The KYAPA kinky thread tee descriptor 311 transmits the information about functions (image-processing function etc.), capacity, etc. of a printer (resolution etc.) to a formatting server.

[0048] The rendering of the data which interpreted the job ticket, gained resources (HTML or XML format), such as a required document and an image, by the above configuration, were transformed to the SVG format by the formatting server if needed, and were changed is carried out, and printing \*\*\*\*\* can do it.

[0049] <Configuration of formatting server> drawing 4 is the block diagram of the formatting server 202.

[0050] In the formatting server 202, if the document request receivers 405 are information required for formatting of the paper size sent from the document collector 302, and reference printing and they are direct printing about URL of a document, they will receive the data of XML or a HTML format.

Moreover, the document request receiver 405 transmits the document file and image data file which were described using the tag set of SVG changed from XML or HTML to the document collector 302.

[0051] A translator 402 reads a style sheet etc. from a file system 403 if needed, HTML and XML data are changed into an XHTML format, and the data is further changed into a SVG format by the formatter 401. Since an XHTML format is HTML defined as having explained previously by XML, it is comparatively easy also for conversion from XML. [ of conversion from HTML ]

[0052] Moreover, although it is the format that SVG is also defined by XML, this conversion is performed with reference to the size information received with the document request receivers 405, such as a function, capacity, etc. of a printer which were received with the KYAPA kinky thread tee register 404. for example, the time of printing to XHTML -- a page -- since there is no concept, a page break must be carried out in the case of conversion to SVG. At this time, a paper size and information, such as resolution, are referred to for the decision of a break location etc.

[0053] Thus, the changed data of a SVG format are passed to the document request receiver 405, and are transmitted to XML controller 101b of an XML printer from there.

[0054] In this way, the data described by HTML or XML are changed into SVG by the formatting server 202, and are inputted into the XML printer 201.

[0055] If it is analyzed by the document parser 304 and there is a pad object, they will read it, the data of SVG inputted into the XML printer 201 are embedded in a document, and after being orthopedically

operated by the specified format, a printout will be carried out as explained previously.

[0056] <Printing procedure> drawing 5 shows the exchange procedure of the message at the time of reference printing between an XML printer, and a formatting server and a document server.

[0057] First, if a job ticket is published to an XML printer, an XML printer will read the document from a document server according to URL of the specified document (502), and will gain the specified HTML document (504). Once an XML printer stores it, it transmits the HTML document gained from the document server to a formatting server, and is made to change it into a SVG format (506). A formatting server requires and (508) acquires information, such as information, such as a paper size which is needed at the time of conversion, and resolution about the engine performance of a printer, to an XML printer (510).

[0058] A formatting server changes a HTML document into a SVG document with reference to those information, and returns it to an XML printer (512).

[0059] If an XML printer analyzes the SVG document which received and has embedded URL, that the object specified by it should be gained, a document server will be accessed (514) and an object will be gained (516).

[0060] In the above-mentioned sequence, the procedure of an XML printer and each formatting server is as follows. Drawing 11 shows the flow chart of the procedure of the XML printer which received the job ticket from the user, and drawing 12 shows the flow chart of the procedure of the formatting server which received XML or a HTML document from the XML printer.

[0061] In drawing 11, if a job ticket is published to an XML printer, it will judge whether the operation which received it and was specified is reference printing, or an XML printer is direct printing (step S1100). If it is reference printing, the document specified by URL will be read from a document server using a HTTP client function (step S1101). In addition, with reference to a cache, the document and object by which the cache is carried out are first read from a cache at this time.

[0062] When a document is able to be gained, the XML document or HTML document to which the job ticket received the HTML document which was gained in reference printing in direct printing is transmitted to a formatting server (step S1102).

[0063] Then, after exchange of printer KYAPA kinky thread tee information is performed between formatting servers if needed, a SVG document is received from a formatting server (step S1103). And it is judged whether there is any pad object by analyzing the document (step S1104), if it judges (step S1105) and there is an object, the object will be either a HTML document or an XML document, or it is the image which is neither a HTML document nor an XML document (step S1107). If it is a bitmapped image, JPEG, a GIF image, etc. when it is not any, either for example, the object will be acquired based on URL and the judgment of a pad object will be repeated again (step S1105). At this time, the hard disk etc. carries out the cache field cache of the document and object which were acquired, and they are referred to in step S1001.

[0064] If processing of a pad object is finished, the rendering of the SVG document will be carried out, it will be bit-map-ized, and it will be made to print from printer engine (step S1106).

[0065] In drawing 12, first, a formatting server will require and acquire printer KYAPA kinky thread tee information for the controller of an XML printer, if XML or a HTML document is received from an XML printer (step S1201). And the HTML document which received is changed into an XHTML document (step S1202). Under the present circumstances, with reference to the style sheet specified with the job ticket, a HTML document is inserted in the format of the document defined by that style sheet, and it considers as the XHTML document of a new format. The typeface of an alphabetic character, size, the method of a paragraph division, the layout of an image, etc. are defined by the style sheet, for example.

[0066] The document once changed into XHTML is changed into a SVG document with reference to the function and engine performance of a printer which were acquired at step S1201 (step S1203).

[0067] The HTML document defined as what should be displayed essentially as mentioned above is convertible for the SVG document of the page unit printed by referring to a style sheet and printer KYAPA kinky thread tee information.

[0068] Thus, printing by the printer is attained as it is by changing the document described by HTML or XHTML into the SVG format defined by XML. It is not necessary to complete a document and to change that document into the format which can be interpreted by the printer with a host computer, like the conventional printing system, in this system. Even if the objects which should be embedded into it are reference data, such as URL and a file name, a printer can collect objects from these reference data, can complete a document, and can make a document print in this system.

[0069] Therefore, output processing in the host computer for [ a host computer / the conventional printer driver becomes unnecessary and ] printing is lost, and a host's load is mitigated.

[0070] Moreover, there is not even need of passing the document itself to a printer and reference printing can be made to perform by passing reference data, such as URL, to a printer.

[0071] Since the object furthermore embedded has been independent of a document, even when changing the object, it is unnecessary to reedit the whole document etc. and it just needs to replace the object. Therefore, if an object is an image, it will be ready of the image of the resolution in which a display differs from printing.

[0072] Furthermore, by carrying out the cache of a document or the object, as long as it has stored in the cache, it is not necessary to acquire an object through a communication link.

[0073] Furthermore, it is possible to change and print a layout by changing a style sheet by using the style sheet, even if it is one document.

[0074] Furthermore, since the function which decodes coded data, such as JPEG and GIF, is built in a printer, the load in a host computer is mitigable.

[0075] <Variation of printing procedure> drawing 8 is the mimetic diagram showing the situation of reference printing performed by the above configurations. In drawing 8 , if a job ticket is transmitted to an XML printer, as for (1) and an XML printer, it will be transmitted to a formatting [ a document server-cum-] server, and a formatting [ (2) document server-cum-] server will acquire the body of a document from URL which received (3). When a formatting [ a document server-cum-] server receives the document, it changes into a SVG format, and it transmits to (4) and an XML printer and they are made to print (5).

[0076] Although the XML printer was gaining the document, in this way, the document acquisition and the conversion to a SVG format to a formatting [ a document server-cum-] server can be made to be able to process, and a printer can also consist of systems mentioned above so that reception and printing of a job ticket may be performed. In this system configuration, a printer waits to input a SVG document from a formatting server, and should just print. All processings of drawing 11 and drawing 12 are performed by the formatting server.

[0077] Drawing 9 is the mimetic diagram showing other gestalten of direct printing. If the document of an XML format is outputted from a word processor etc. and a user receives the document at a terminal, a user will add assignment of format etc. to the document, and will transmit to a server (it serves as a formatting server in drawing 9 ). This serves as a job ticket (1). A server transmits it to an XML printer, it transmits to a formatting server and (2) and an XML printer are transformed to a SVG format (3). A formatting server makes an XML printer transmit and print the document changed into SVG (4). Moreover, a user terminal may attach the document of an XML format to an electronic mail, and may transmit to a server. A server receives the electronic mail, changes the attached document into the data of a SVG format, and transmits to an XML printer.

[0078] As mentioned above, even if the functional assignment of a formatting server and an XML printer may change, there is no place which changes to the function and effectiveness as a system as shown by this example.

[0079] The storage which recorded the program code of the software which realizes the function of the operation gestalt which the purpose of this invention mentioned above which is [the gestalt of other operations] is supplied to a system or equipment, and it is attained also by reading and performing the program code with which the computer (or CPU and MPU) of the system or equipment was stored in the storage.

[0080] In this case, the program code itself read from the storage will realize the new function of this

invention, and the storage memorized to that program code will constitute this invention.

[0081] Moreover, device information data may be held at the accessible server etc. from HDD built in an image processing system and image data expansion equipment, the storage by which external connection is made, and image data expansion equipment. Furthermore, device information data can use what the user set as arbitration.

[0082] As a storage for supplying a program code, a floppy disk, a hard disk, an optical disk, a magneto-optic disk, CD-ROM, CD-R, a magnetic tape, the memory card of a non-volatile, ROM, etc. can be used, for example.

[0083] Moreover, by performing the program code which the computer read, OS (operating system) which the function of the operation gestalt mentioned above is not only realized, but is working on a computer based on directions of the program code performs a part or all of actual processing, and also when the function of the gestalt of operation mentioned above by the processing is realized, it is contained.

[0084] Furthermore, after the program code read from the storage is written in the memory with which the functional expansion unit connected to the functional add-in board inserted in the computer or the computer is equipped, a part or all of processing that CPU with which the functional add-in board and functional expansion unit are equipped is actual performs, and also when the function of the operation gestalt mentioned above by the processing is realized, it is contained based on directions of the program code.

[0085] When applying this invention to the above-mentioned storage, the program code corresponding to the flow chart (shown in drawing 11 thru/or drawing 12 ) explained previously will be stored in the storage.

[0086]

[Effect of the Invention] As explained above, the document data which were described in the standardized language according to this invention can be interpreted in a format as it is, and the printer system which can be printed can be realized.

[0087] Furthermore, even if the objects embedded into the document are reference data, such as URL and a file name, they can collect objects from these reference data, can complete a document, and can make it print.

[0088] Furthermore, it can print by receiving not the document itself but reference data.

[0089] Furthermore, it is possible to change and print a layout simply about one document.

---

[Translation done.]

\* NOTICES \*

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

## CLAIMS

### [Claim(s)]

[Claim 1] If it is the printer system connected to the network and printing directions data are received An acquisition means to gain document data from the specified location when it is location data which specified the location on the network of document data, The printer system characterized by having an interpretation means to interpret the document data gained with said acquisition means, and a printing means to carry out a rendering based on the document data interpreted by said interpretation means, and to print.

[Claim 2] Said interpretation means is a printer system according to claim 1 characterized by interpreting the document data when it has further a distinction means to distinguish whether it is location data with which it specified the location on the network of document data when printing directions data are received, or it is document data and printing directions data are document data.

[Claim 3] It is the printer system according to claim 1 which as for said document data format is document data of an indeterminate, and said interpretation means has a conversion means to change into the format that said document data can be interpreted, and is characterized by this conversion means deciding the format at the time of printing with reference to form information at the time of conversion of document data.

[Claim 4] Said conversion means is a printer system according to claim 3 characterized by deciding the format of said document data according to the style sheet which defined the format of document data beforehand.

[Claim 5] Said interpretation means is a printer system given in claim 1 characterized by gaining the specified object based on assignment of the object concerned, and embedding in the appointed place of said document data thru/or any 1 term of 4, when assignment of the object which should be embedded to said document data is found out.

[Claim 6] Said interpretation means is a printer system according to claim 5 which embeds the object to said document data, and will be first characterized by to gain an object with reference to the specified location if not stored if stored there with reference to said cache means in case the object which has a cache means to store the gained object and was specified based on assignment of said object is gained.

[Claim 7] The printer system according to claim 1 characterized by having further a decode means to decode coded data.

[Claim 8] Said printing means is a printer system according to claim 1 characterized by having further a color matching means to adjust the color of said document data, and the color information outputted by said color print facility in order to have a color print facility and to color-print by this color print facility.

[Claim 9] In the printer system connected to the network, if printing directions data are received The acquisition process which gains document data from the specified location when it is location data which specified the location on the network of document data, The control approach of the printer system characterized by having the interpretation process which interprets the document data gained according to said acquisition process, and the printed presswork which carries out a rendering based on

the document data interpreted according to said interpretation process.

[Claim 10] Said interpretation process is the control approach of the printer system according to claim 9 characterized by interpreting the document data when it has further the distinction process which distinguishes whether it is location data with which it specified the location on the network of document data when printing directions data are received, or it is document data and printing directions data are document data.

[Claim 11] It is the control approach of the printer system according to claim 10 which as for said document data format is document data of an indeterminate, and said interpretation process has the conversion process changed into the format that said document data can be interpreted, and is characterized by this conversion process deciding the format at the time of printing with reference to form information at the time of conversion of document data.

[Claim 12] Said conversion process is the control approach of the printer system according to claim 11 characterized by deciding the format of said document data according to the style sheet which defined the format of document data beforehand.

[Claim 13] Said interpretation process is the control approach of a printer system given in claim 9 characterized by gaining the specified object based on assignment of the object concerned, and embedding in the appointed place of said document data thru/or any 1 term of 12, when assignment of the object which should be embedded to said document data is found out.

[Claim 14] Said interpretation process is the control approach of the printer system according to claim 13 characterized by gaining an object with reference to the specified location if the gained object is stored in a cache, and are stored there, and the object is embedded to said document data and it is not probably stored with reference to said cache in case the object specified based on assignment of said object is gained.

[Claim 15] If it is format conversion equipment connected to the printer which can process the document data described in predetermined language, and the network and document data are received Format conversion equipment characterized by having a conversion means to change the document data into the format that said printer can be processed, with reference to the form information specified to the document concerned, and an acquisition means to acquire the functional information on said printer on the occasion of conversion by said conversion means.

[Claim 16] Said conversion means is format conversion equipment according to claim 15 characterized by changing the document data of XML or a HTML format into the document data of a SVG format.

[Claim 17] If it is the printer connected to the format conversion equipment changed into the format that document data can be processed, and a network and printing directions data are received An acquisition means to gain document data from the specified location when it is location data which specified the location on the network of document data, The conversion means which transmits the document data gained to said format conversion equipment, and is transformed to the format which can be processed, The printer characterized by having an interpretation means to interpret the document data changed by said conversion means, and a printing means to carry out a rendering based on the document data interpreted by said interpretation means, and to print.

[Claim 18] Said interpretation means is a printer according to claim 17 characterized by gaining the specified object based on assignment of the object concerned, and embedding in the appointed place of said document data, when assignment of the object which should be embedded to said document data is found out.

[Claim 19] The printer system characterized by coming to combine format conversion equipment according to claim 15 or 16 and a printer according to claim 17 or 18.

[Claim 20] If it is a computer-readable storage for storing the computer program for changing the document data described in predetermined language into the format which can be processed by the printer and said computer program receives document data The code of the conversion process which changes the document data into the format that said printer can be processed, with reference to the form information specified to the document concerned, The computer-readable storage characterized by including the code of the acquisition process which acquires the functional information on said printer



on the occasion of the conversion in the code of said conversion process.

[Claim 21] It is a computer-readable storage for storing the computer program which controls the printer connected to the format conversion equipment changed into the format that document data can be processed, and a network. The code of the acquisition process which gains document data from the specified location when said computer program receives printing directions data and it is location data which specified the location on the network of document data, The code of the conversion process which transmits the document data gained to said format conversion equipment, and is transformed to the format which can be processed, The computer-readable storage characterized by including the code of the interpretation process which interprets the document data changed in code of said conversion process, and the code of the presswork which carries out a rendering based on the document data interpreted in code of said interpretation process.

---

[Translation done.]


## \* NOTICES \*

Japan Patent Office is not responsible for any damages caused by the use of this translation.


1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

## DRAWINGS


[Drawing 1]

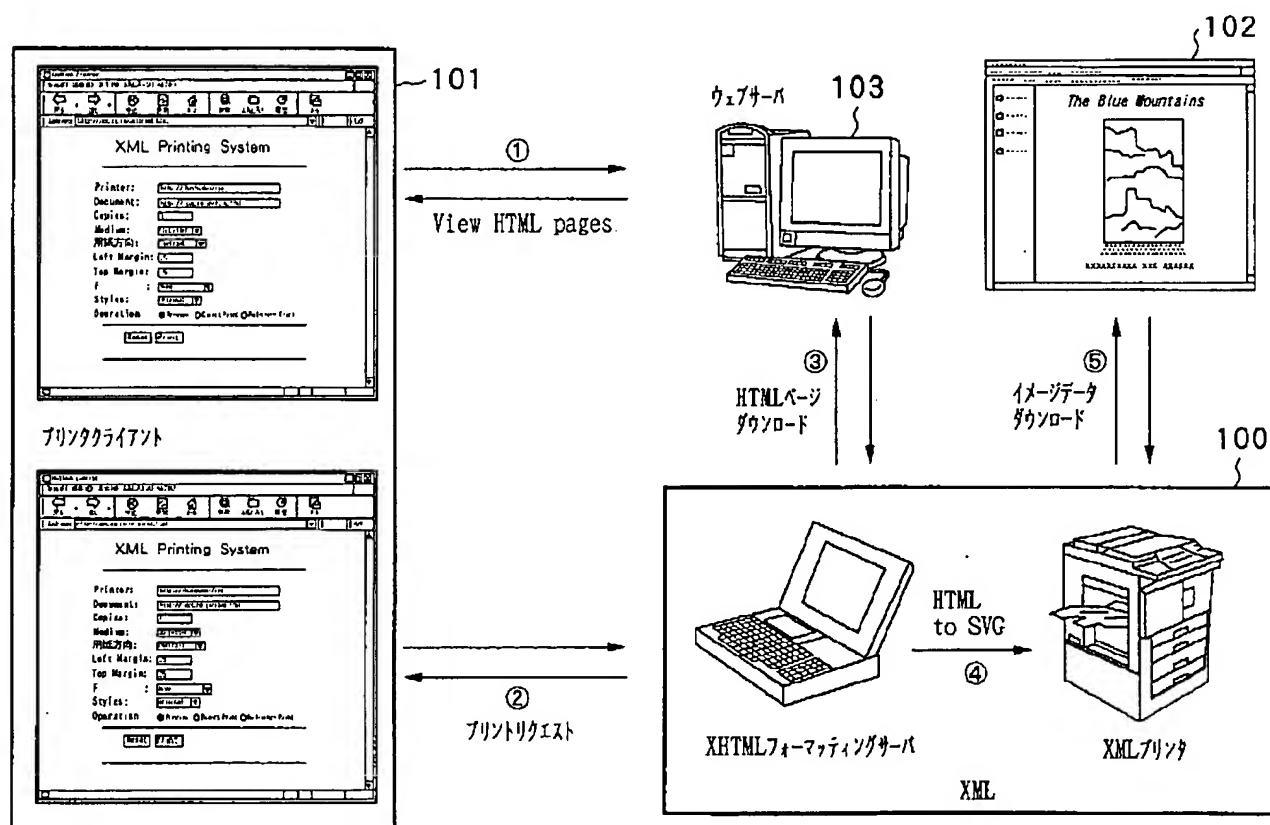


[Drawing 2]

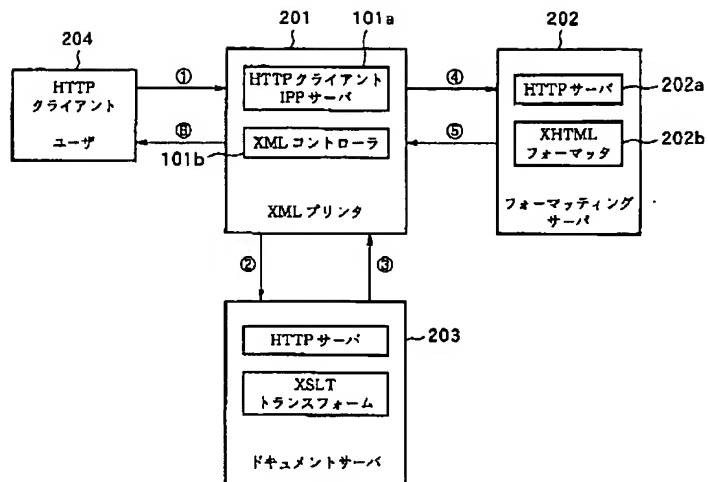


[Drawing 13]

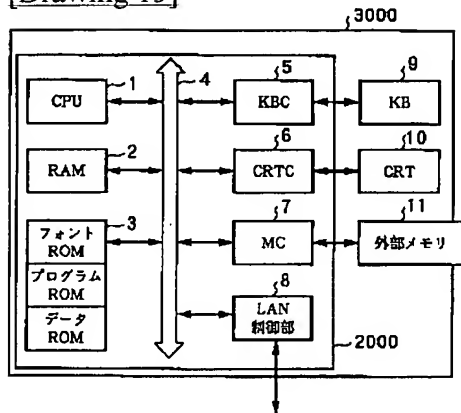


[Drawing 3]

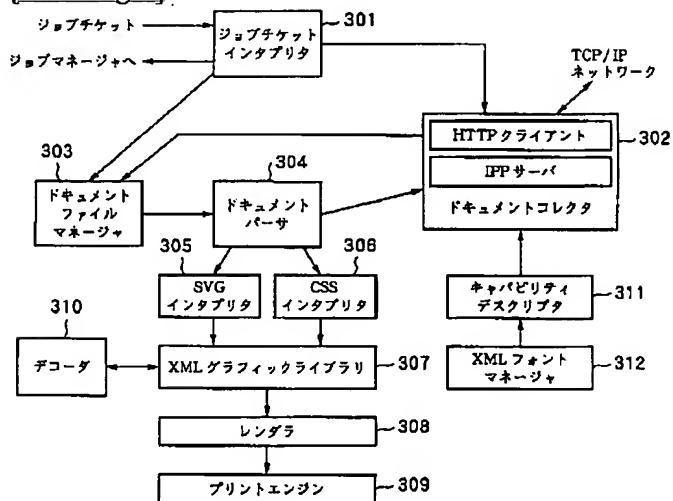


[Drawing 4]

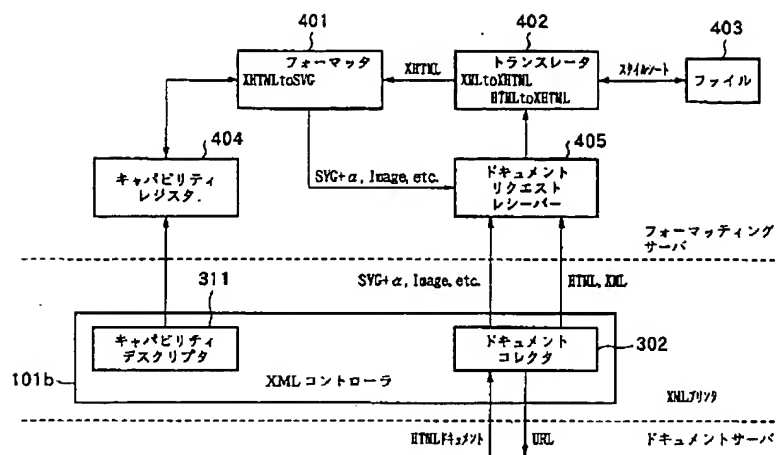

[Drawing 14]

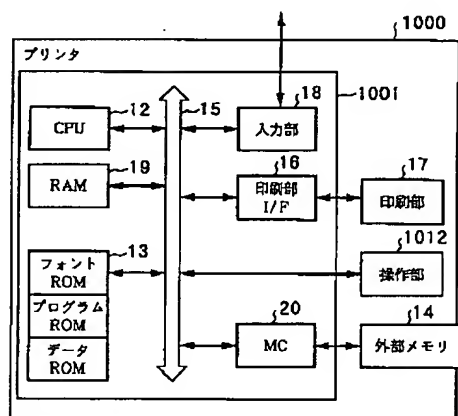


[Drawing 5]

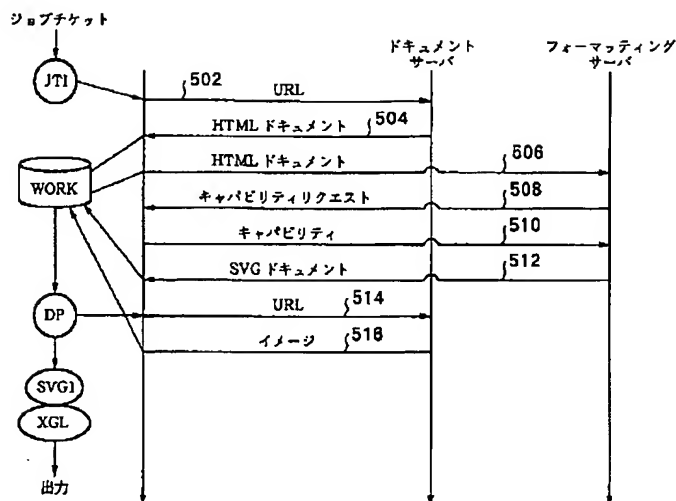

[Drawing 6]


(a)

(b)

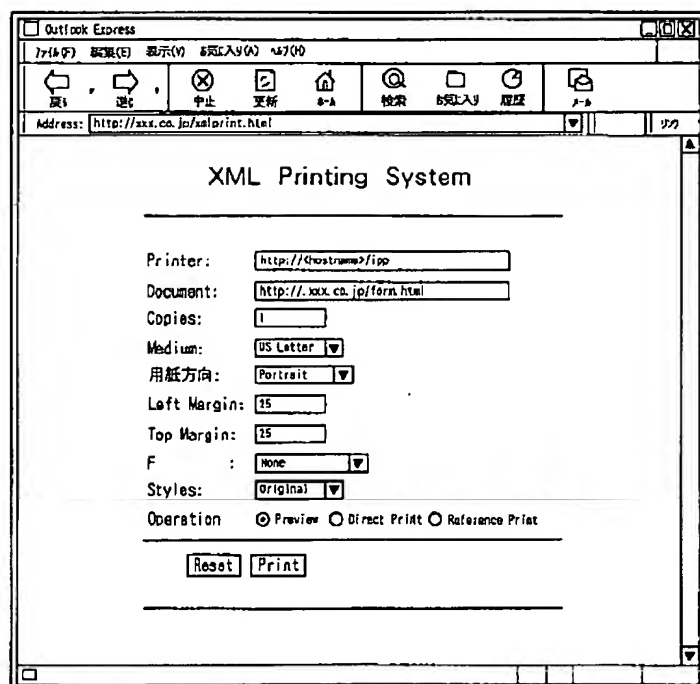


Ganon Expo 2000	
<b>XML Printing System</b>	
● Printer : 192.168.0.1 /ipp ● Page : 192.168.0.3 / Home.html ● Copies : 1 ● Style : <input checked="" type="radio"/> Plain <input type="radio"/> Table <input type="radio"/> Cards <input type="radio"/> Columns <input type="radio"/> Poster <input type="radio"/> Booklet	
<input type="button" value="Reset"/> <input type="button" value="Print"/>	
(c)2000 Ganon, Inc.	
選択 <input type="button" value="Print"/> <input type="button" value="Cancel"/> <input type="button" value="Back"/> <input type="button" value="Forward"/> <input type="button" value="Home"/> <input type="button" value="Stop"/> <input type="button" value="Refresh"/> <input type="button" value="Print"/> a	


[Drawing 7]

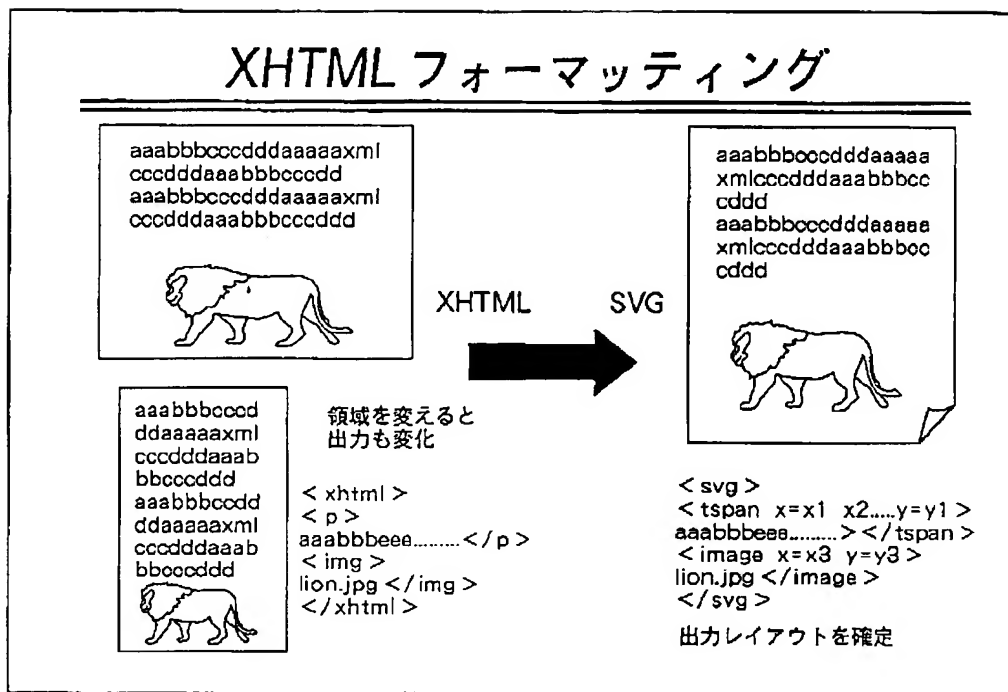

[Drawing 8]

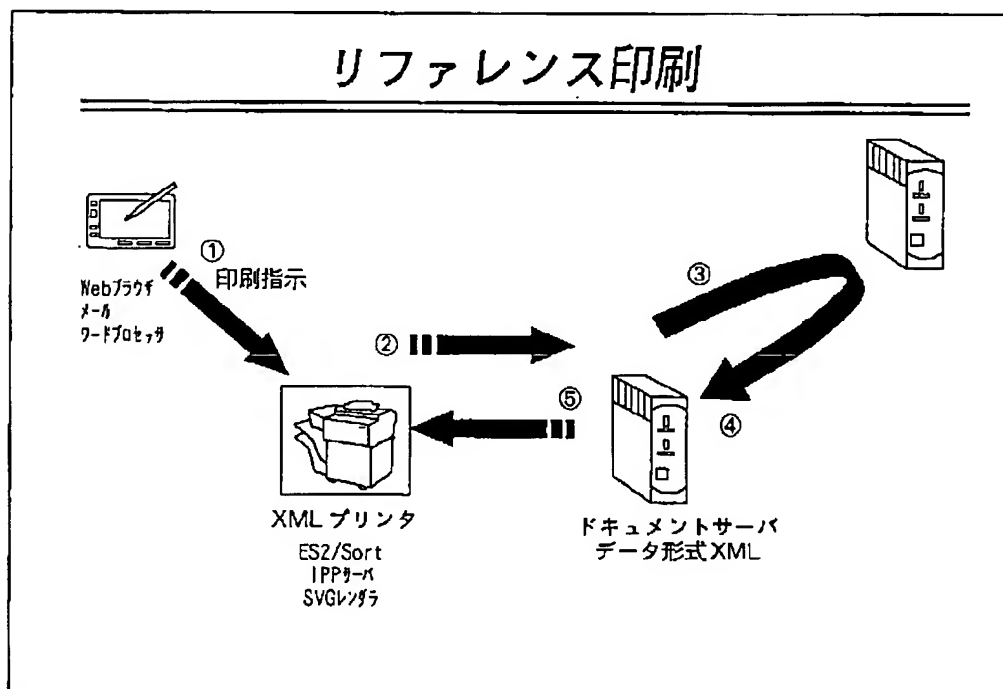


[Drawing 9]

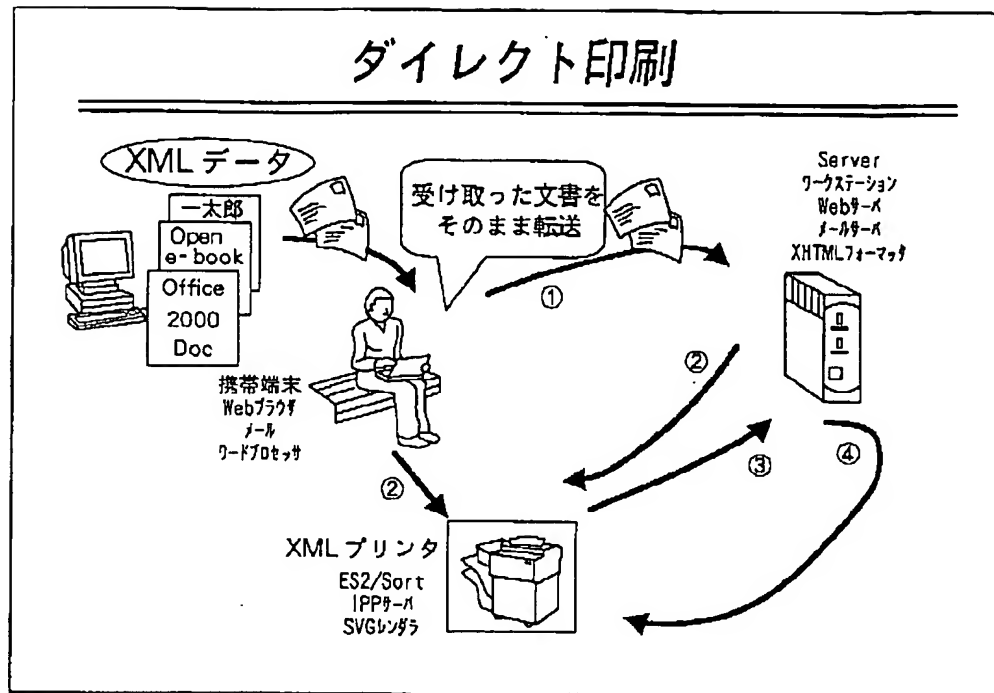


[Drawing 10]




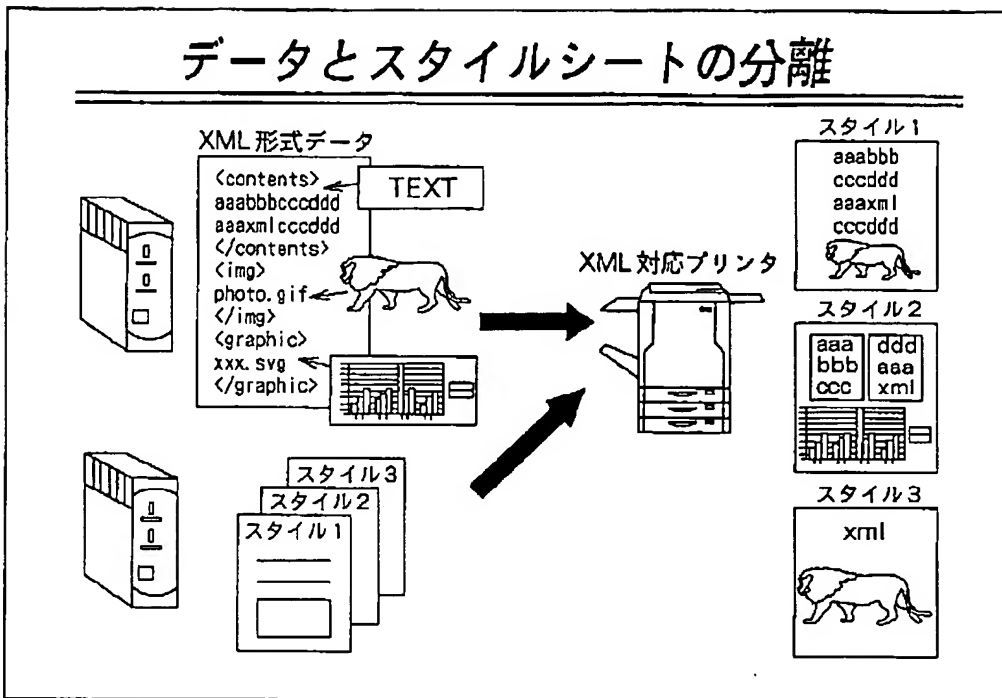

[Drawing 11]

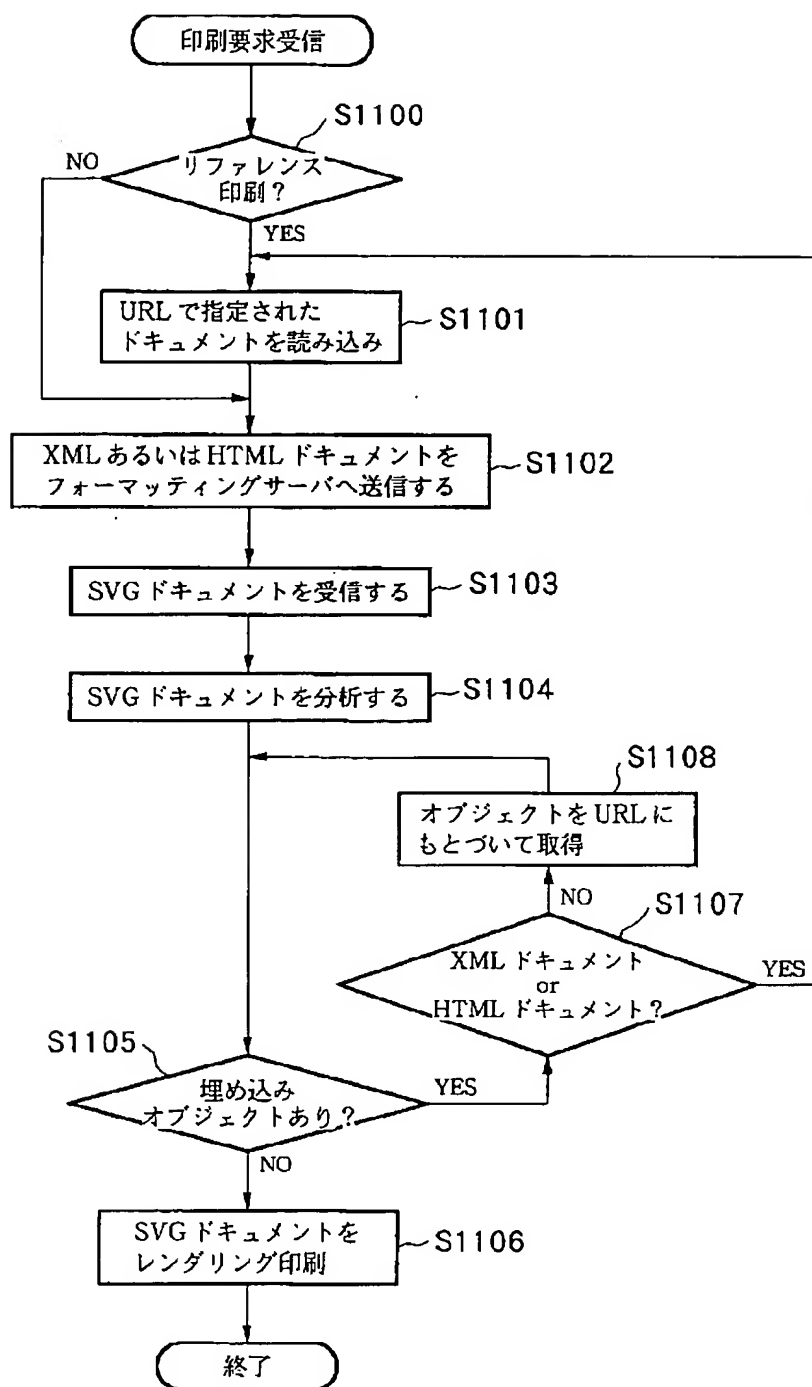

[Drawing 12]

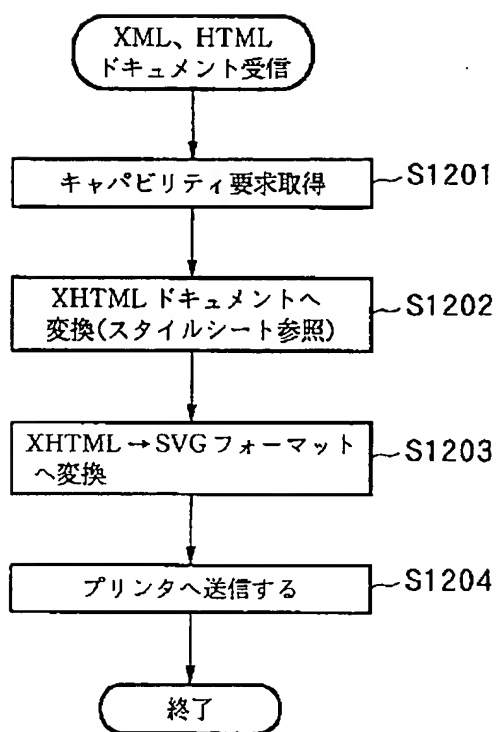

---

[Translation done.]

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**